


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

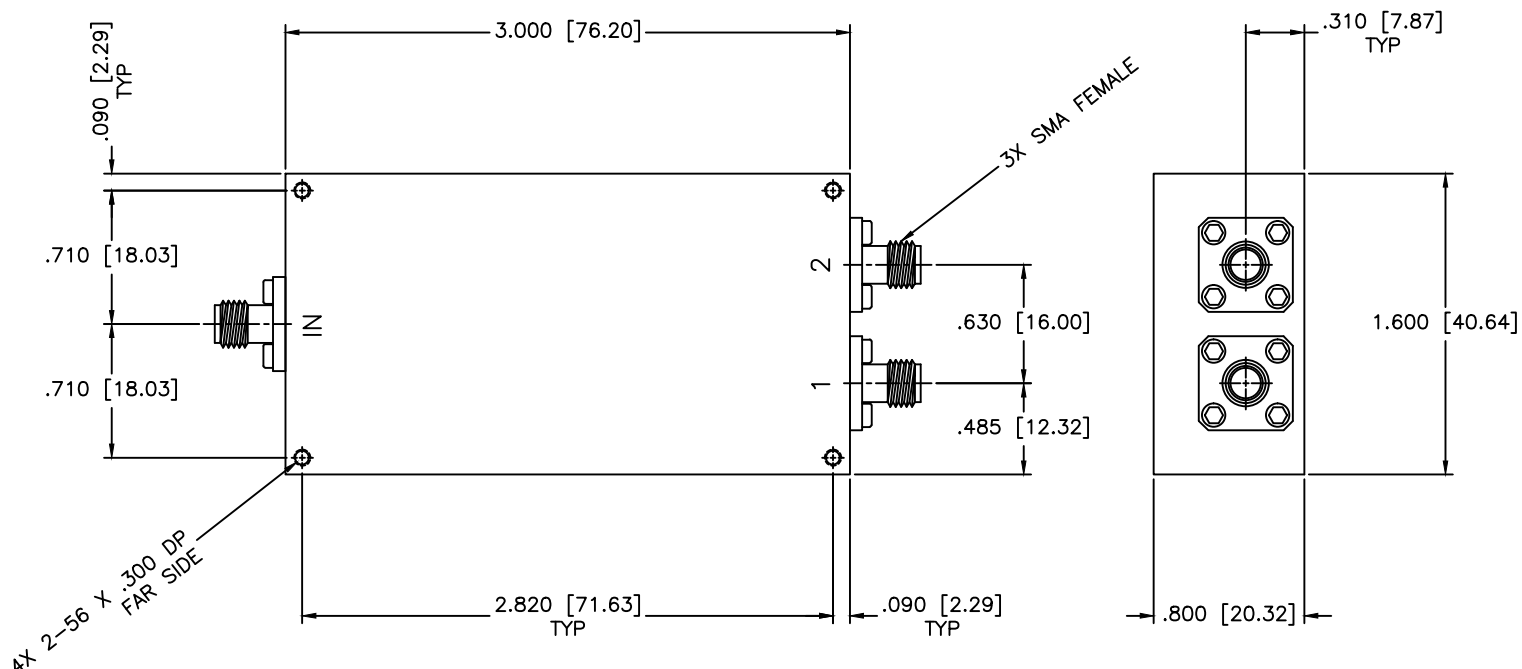

SPECIFICATIONS

Frequency Range: 20–500 MHz
 Insertion Loss: 0.5dB Max.
 Isolation: 25dB Min.
 Phase Balance: ±5 Deg. Max.
 Amplitude Balance: ±0.25dB Max.
 VSWR: 1.35:1 Max.
 Input Power: 25 Watts CW

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-8118 http://www.mcli.com		SCALE: N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A	
DRAWING TITLE:		2-WAY POWER DIVIDER				
PART NO.:		PLH2-23				
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE:	SIZE:	REV:	DWG NO.:
APPROVED:	DATE:			OD2L5	A	N/A
DRAWN: Paiboon Luekhamhan DATE: 02-01-2011		APPROVED: T. Nguyen DATE: 02-01-2011		DO NOT SCALE THE DRAWING		