


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

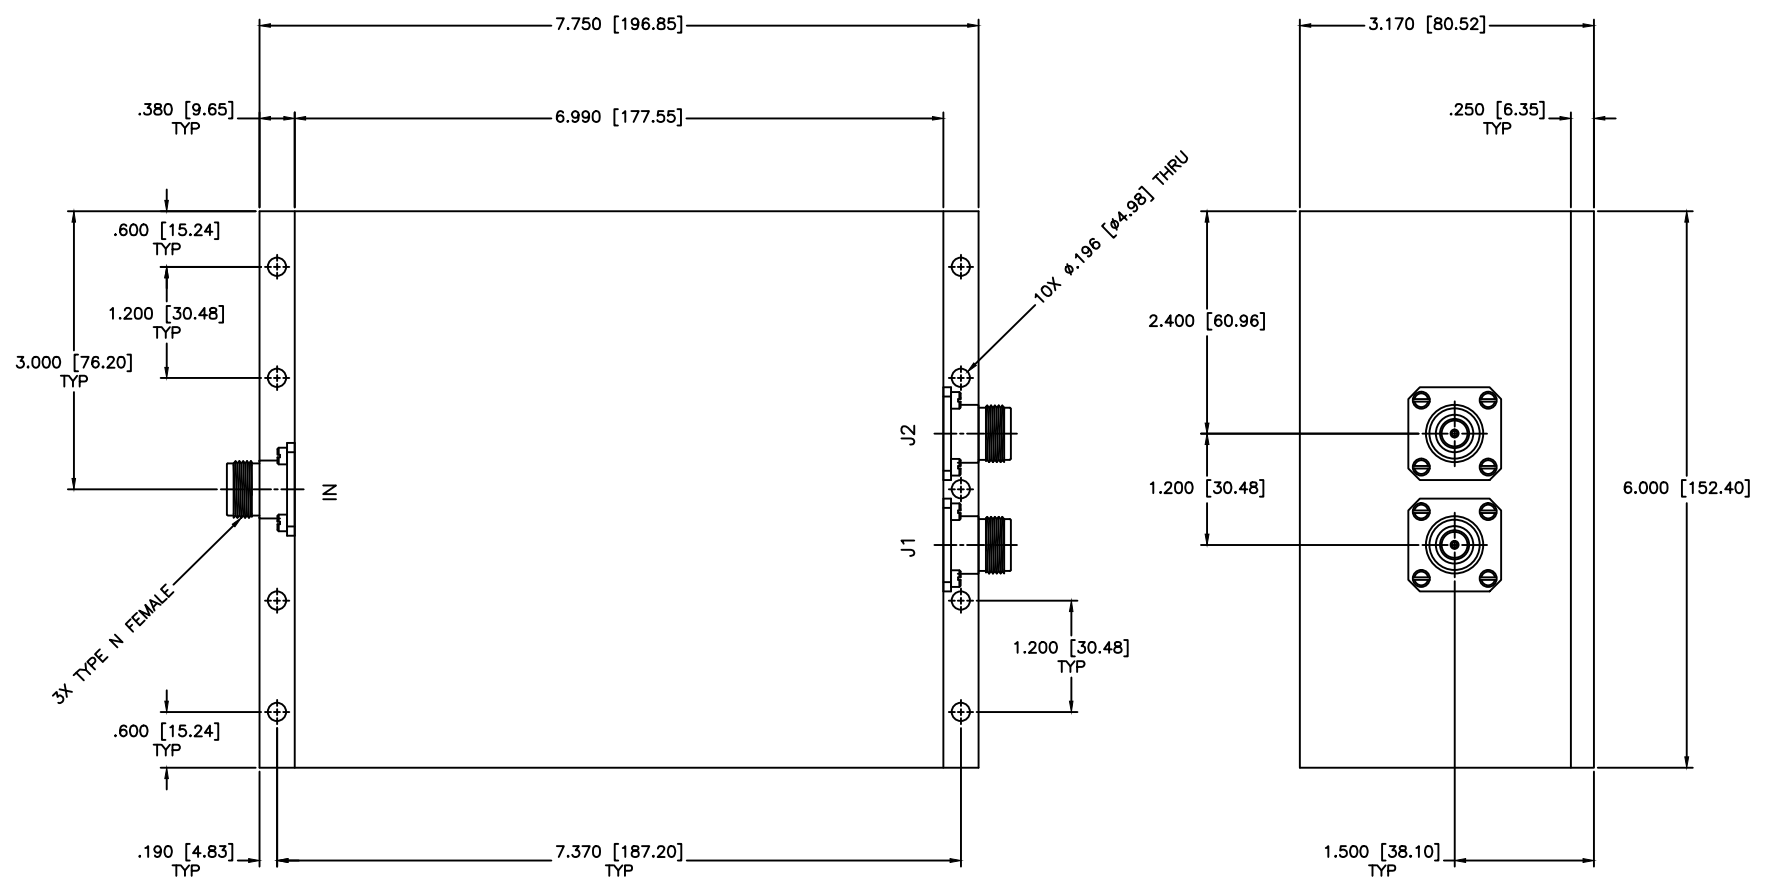

SPECIFICATIONS

Frequency Range: 0.01–250 MHz
 Insertion Loss: 1.5dB Max.
 Isolation: 18dB Min.
 VSWR: 1.40:1 Max.
 Power: 100 W CW
 Amplitude Balance: ±0.6dB Max.
 Phase Balance: ±8 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7256 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE:	N/A
DRAWN: Paloon Luukhamhan				DATE: 01-31-2011	DRAWING TITLE:
APPROVED: T. Nguyen		DATE: 01-31-2011	PART NO.:	PLH2-33	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.01 ± 0.005 ANGLE: ± 1/2°		CAGE CODE:		OD2L5	
THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE DISCLOSED OUTSIDE WITHOUT PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) TYP. FILE: PLH2CHK1		SIZE:	N/A	REV:	N/A
		DWG NO.:		85257	
DO NOT SCALE THE DRAWING					