


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

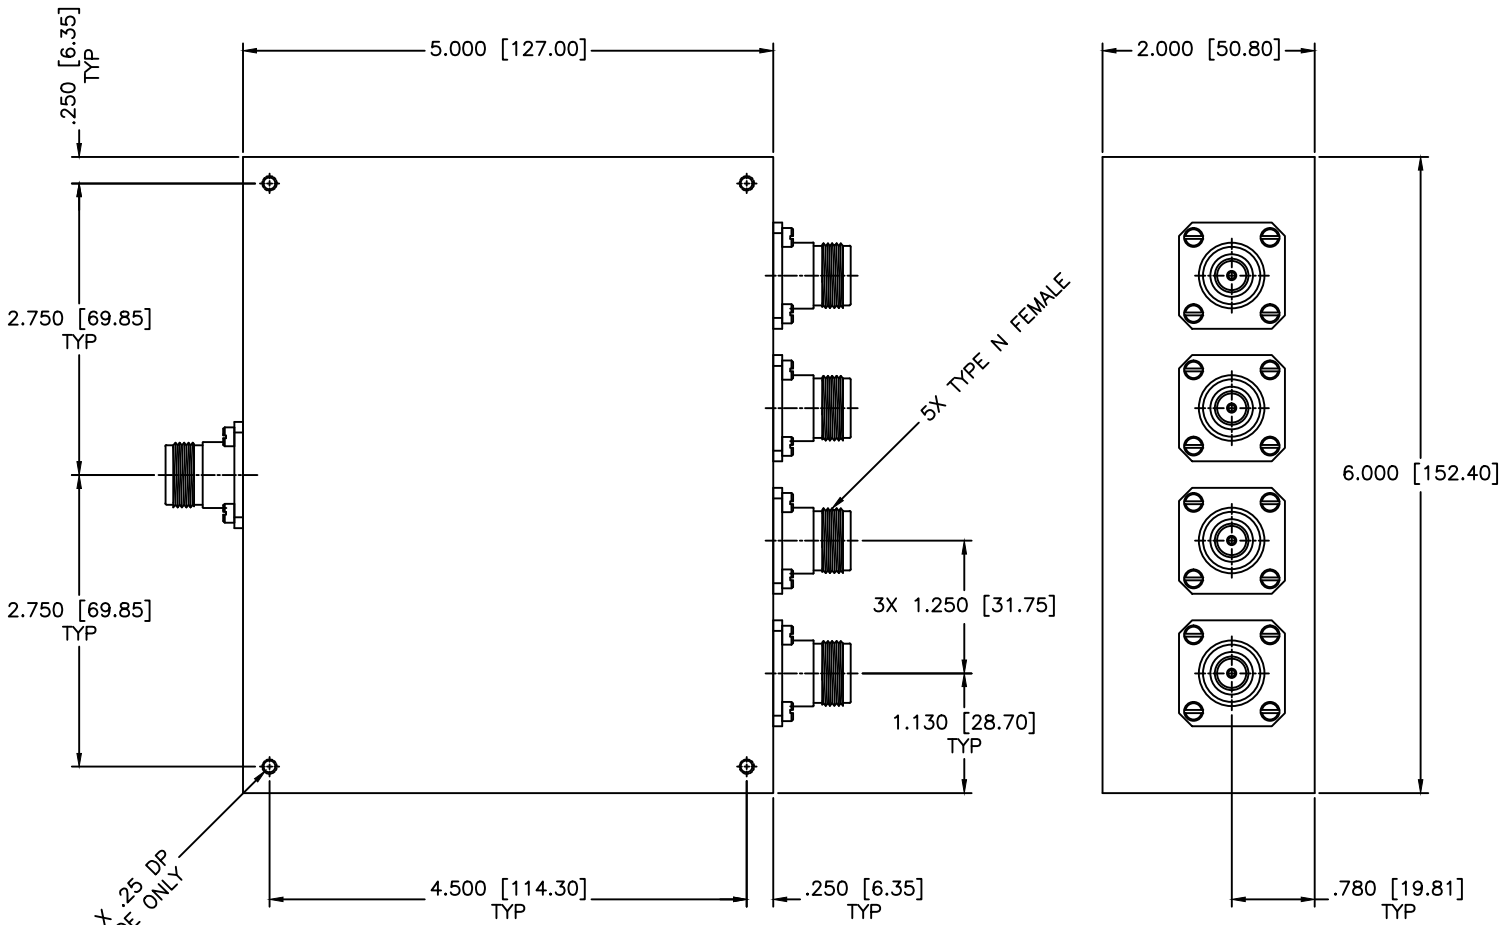

4x 6-32 x .25 DP
FAR SIDE ONLY

5x TYPE-N FEMALE

SPECIFICATIONS

Frequency Range: 470–860 MHz
 Insertion Loss: 0.35dB Max.
 Isolation: 18dB Min.
 Power: 1,000 W CW
 Amplitude Balance: ± 0.2 dB Max.
 VSWR: 1.40:1 Max.
 Phase Balance: ± 5 Deg Max.

MATERIAL:	DRAWING TITLE: 4-WAY POWER DIVIDER/COMBINER	SCALE: N/A
		SHEET: N/A
DRAWING: Paiboon Luekhamhan	DATE: 02-04-2011	PART NO.: PLH4-16-1K
		CAGE CODE: OD2L5
APPROVED: T. Nguyen	DATE: 02-04-2011	SIZE: N/A REV: N/A DWG NO.: 85358
<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$</small>		<small>DO NOT SCALE THE DRAWING</small>



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 544-6254 FAX: (727) 381-8118
 http://www.MCLI.COM

SEE SPECIFICATIONS FOR THE NUMBER & PROPERTY
 AND SHALL NOT BE USED IN OTHERS WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

