


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

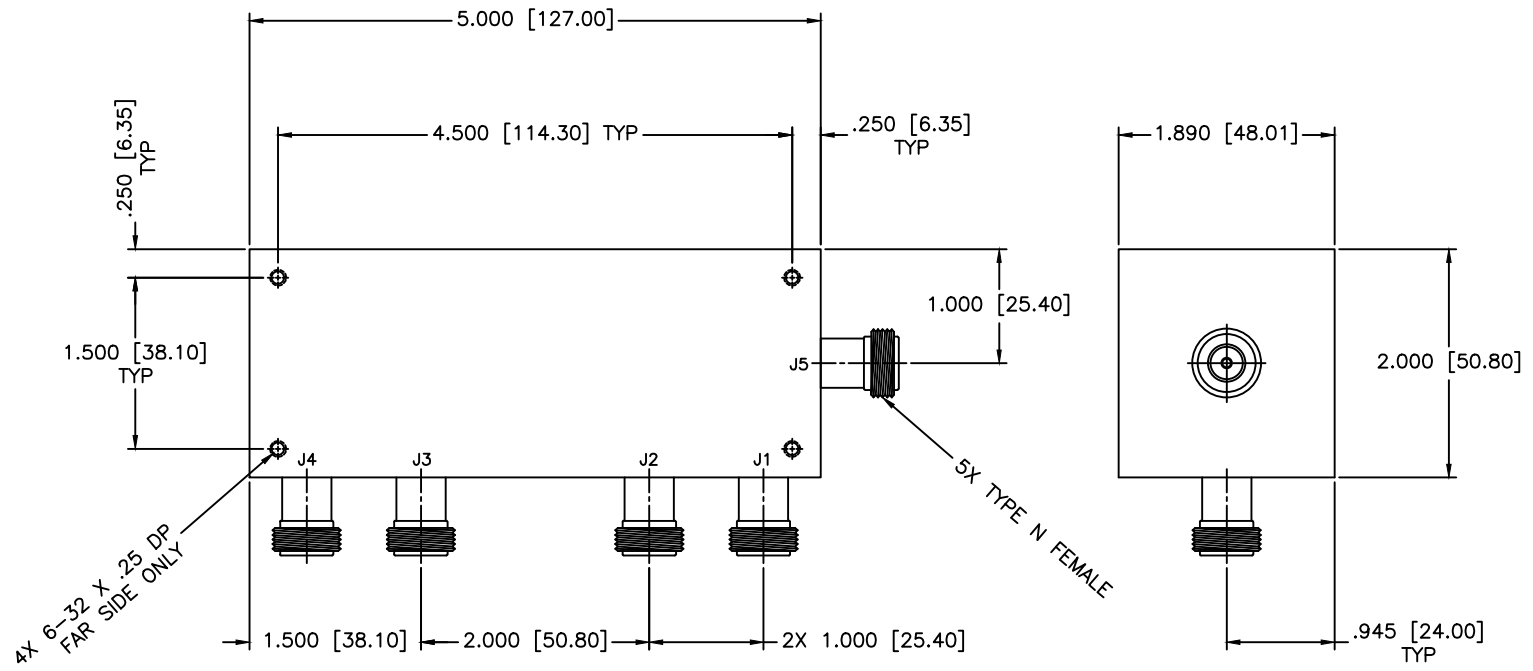

**SPECIFICATIONS**

Frequency Range: 100–1000 MHz  
 Insertion Loss: 0.70dB Min.  
 Isolation: 20dB Min.  
 Power Rating: 25 W CW  
 Amplitude Balance:  $\pm 0.40$ dB Max.  
 VSWR: 1.50:1 Max.  
 Phase Balance:  $\pm 5$  Deg. Max.

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED:		TOLERANCES		DRAWING TITLE:		4-WAY POWER DIVIDER
IN (INCHES) OR (mm)		FRACTIONS: $\pm 1/64$		PART NO.:		PLH4-22/NF
DECIMALS: $\pm 0.01 \pm 0.005$		ANGLE: $\pm 1/2^\circ$		CAGE CODE:		OD2L5
DRAWN: Paboon Luethamhan		DATE: 05-11-2009		SIZE: N/A		REV: N/A
APPROVED: T. Nguyen		DATE: 05-11-2009		DO NOT SCALE THE DRAWING		DWG NO. 84471