


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

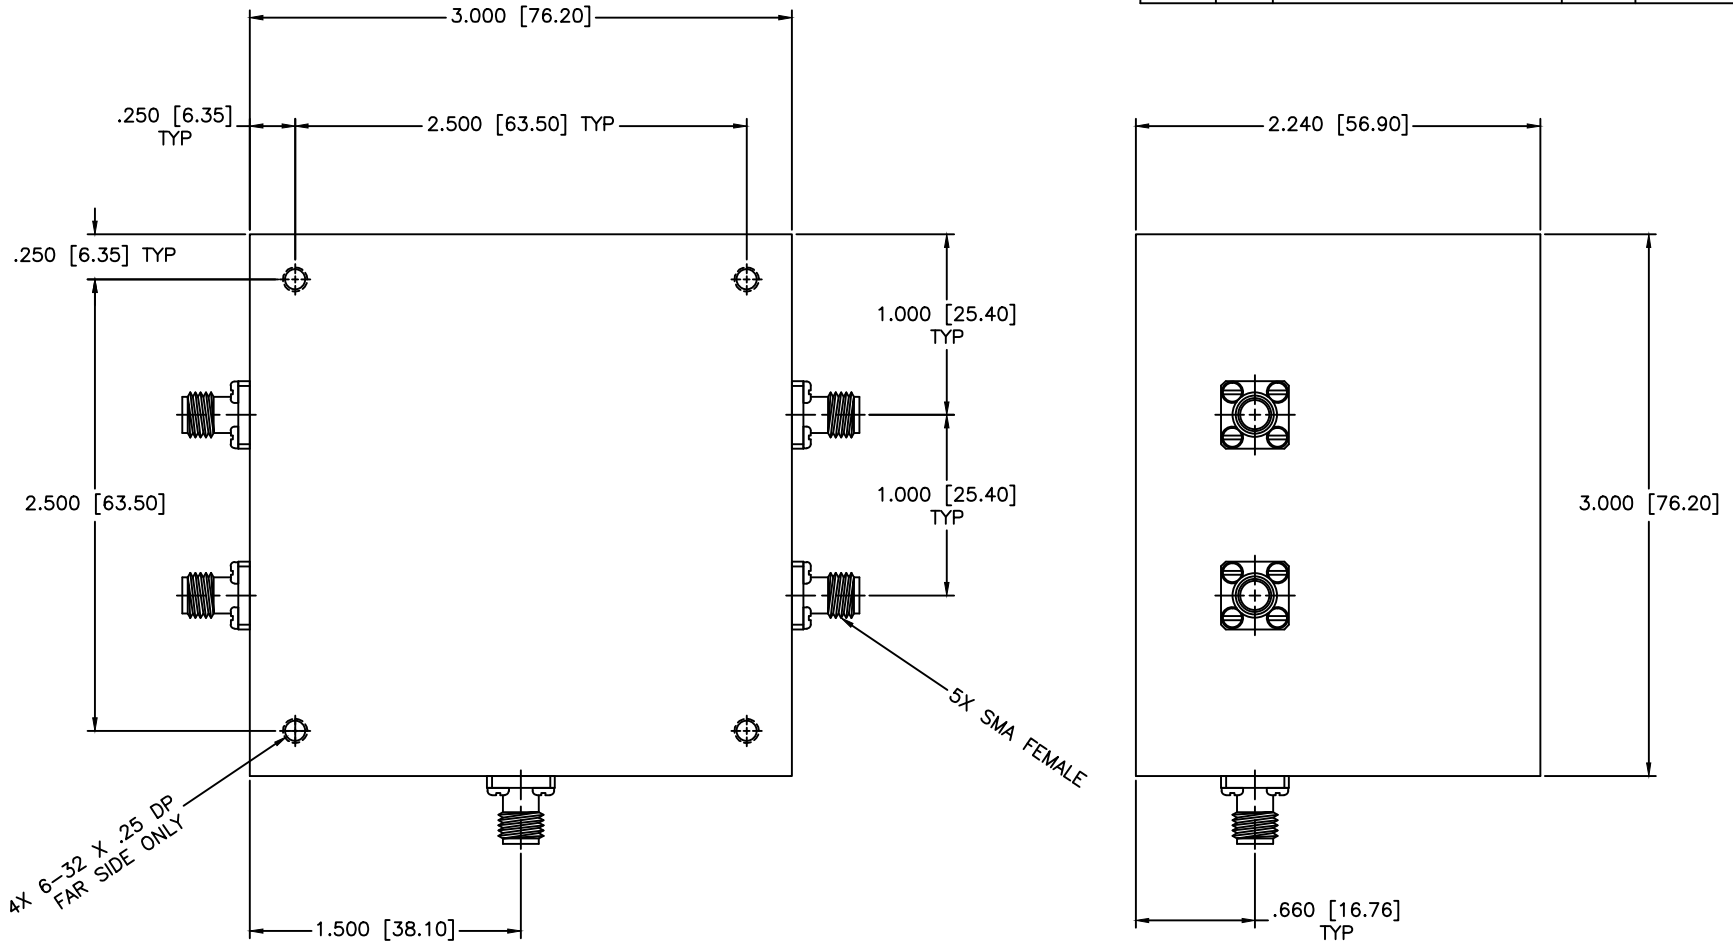

SPECIFICATIONS

Frequency Range: 0.5–30 MHz
 Insertion Loss: 0.5dB Max.
 Isolation: 30dB Min.
 Power: 5 W CW
 Amplitude Balance: ± 0.2 dB Max.
 VSWR: 1.30:1 Max.
 Phase Balance: ± 5 Deg Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 02-03-2011
APPROVED: T. Nguyen	DATE: 02-03-2011



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: $\pm 1/64$
 DECIMALS: $\pm 0.01 \pm 0.005$
 ANGLE: $\pm 1/2^\circ$

DRAWING TITLE: 4-WAY POWER DIVIDERS			
PART NO. PLH4-23			
CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 85333

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)
 THIRD ANGLE PROJECTION

DO NOT SCALE THE DRAWING