


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

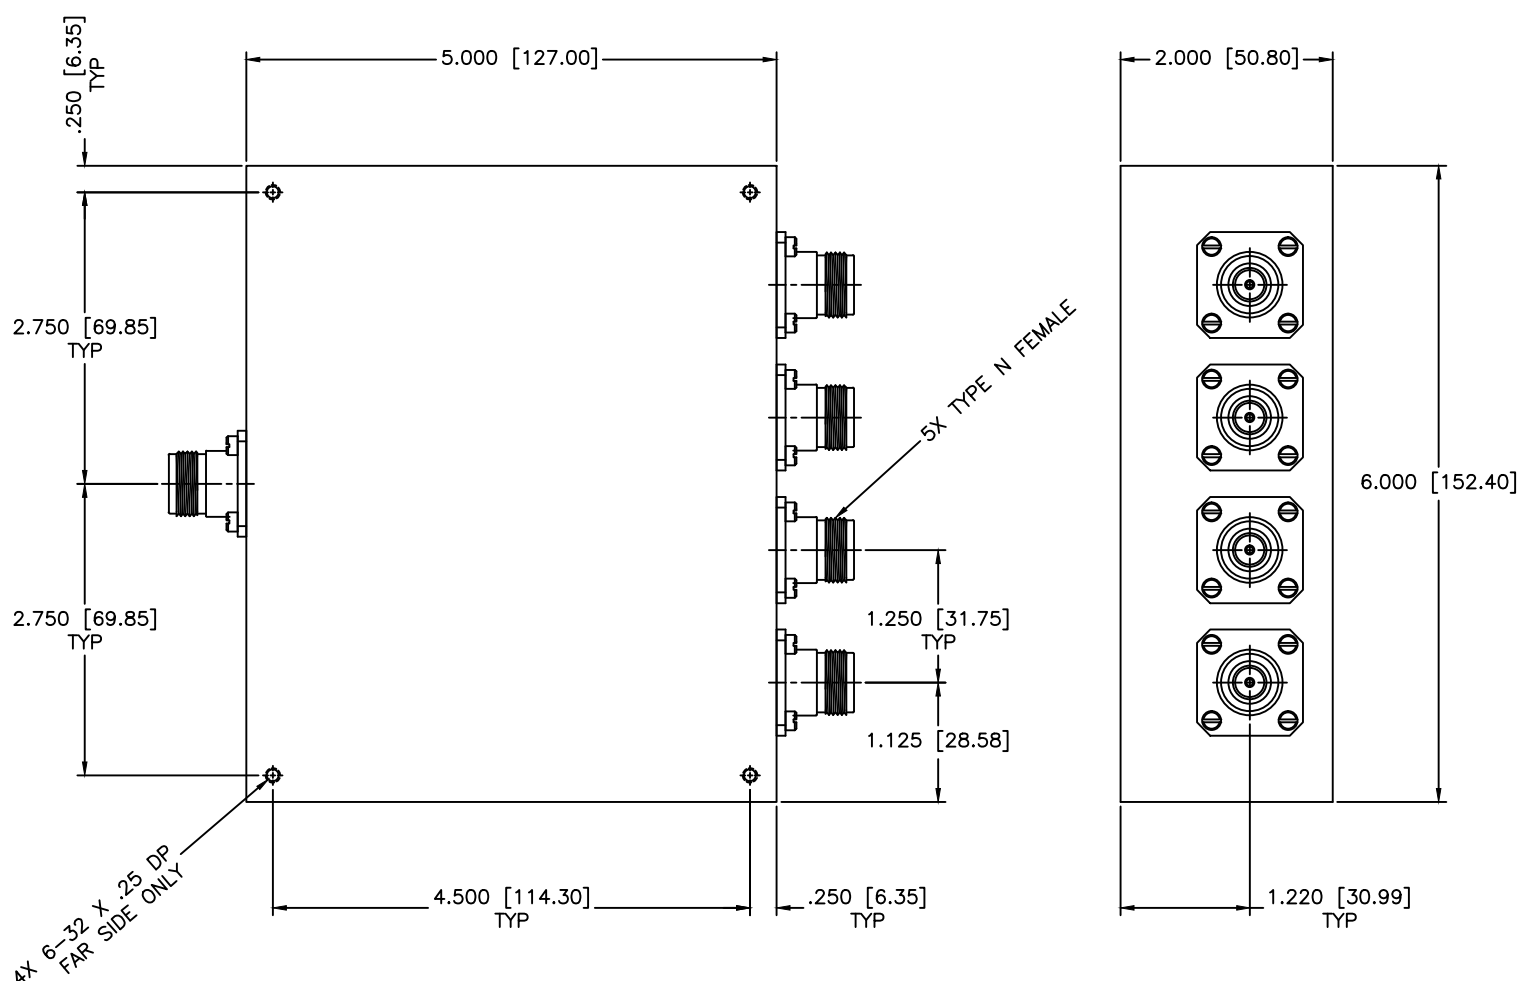

SPECIFICATIONS

Frequency Range: 1–30 MHz
 Insertion Loss: 0.20dB Max.
 Isolation: 25dB Min.
 Power: 200 W CW
 Amplitude Balance: ± 0.1 dB Max.
 VSWR: 1.20:1 Max.
 Phase Balance: ± 3 Deg Max.

MATERIAL:	DRAWING:	DATE:	DATE:		MICROWAVE COMMUNICATIONS LABORATORIES, INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8118 http://www.mcli.com		SCALE:	N/A
					UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE:		SHEET:
DRAWING: Paiboon Luengkhamhan APPROVED: T. Nguyen	DATE: 02-03-2011 DATE: 02-03-2011	PART NO.: PLH4-24	DRAWING TITLE: 4-WAY POWER DIVIDER/COMBINER		DRAWING NO.: 85334		SIZE: N/A N/A DO NOT SCALE THE DRAWING	