


4 3 2 1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

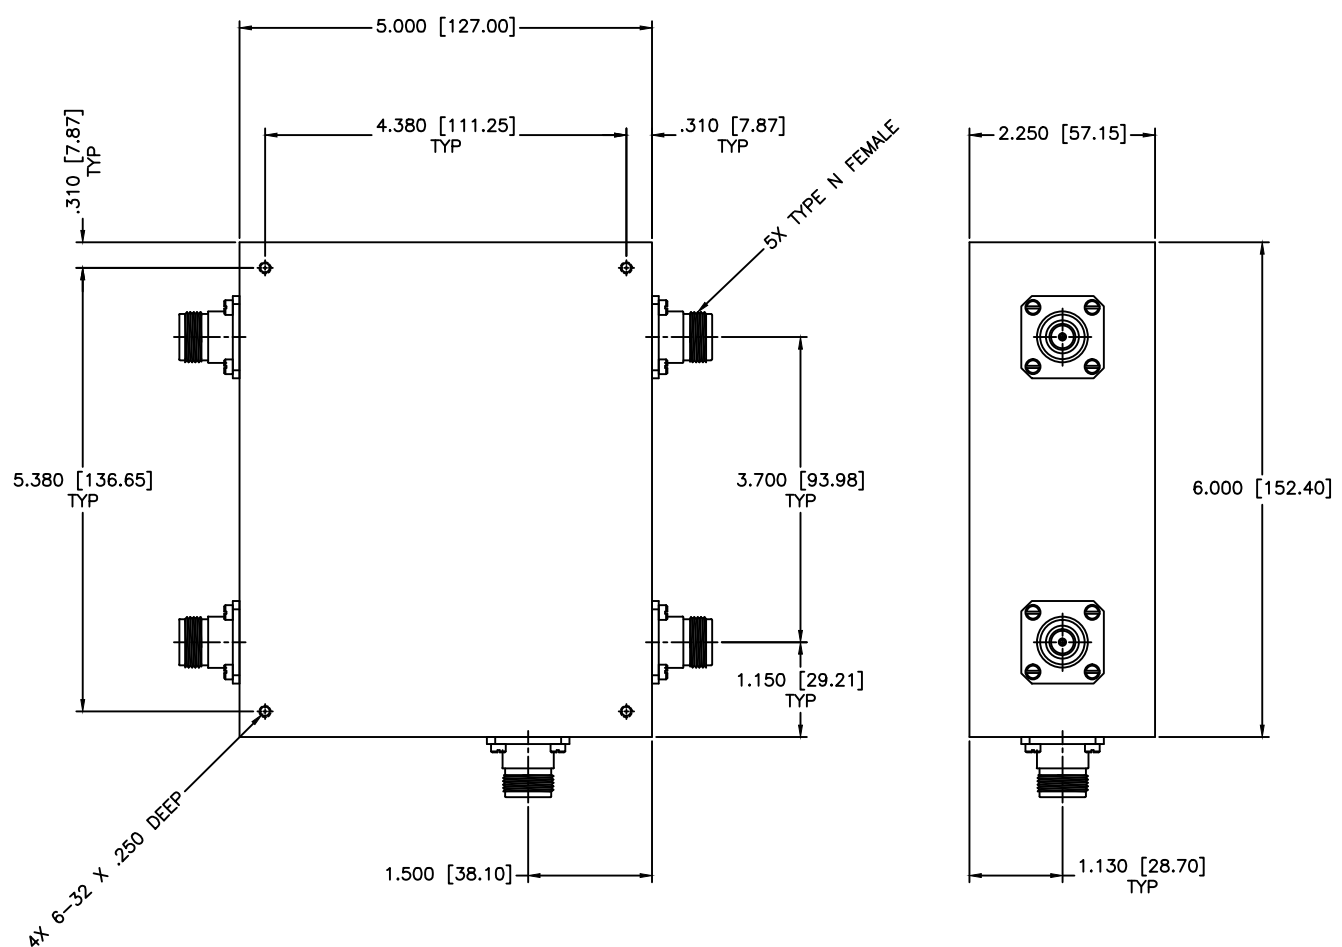

**SPECIFICATIONS**

Frequency Range: 1–500 MHz  
 Insertion Loss: 0.8dB Max.  
 Isolation: 25dB Min.  
 Power: 100 W CW  
 Amplitude Balance:  $\pm 0.70$ dB Max.  
 VSWR: 1.40:1 Max.  
 Phase Balance:  $\pm 5$  Deg Max.

MATERIALS	<b>MCL</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8118 http://www.mcll.com	SCALE:	N/A
		SHEET:	N/A
DRAWING TITLE:	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: <b>4-WAY POWER DIVIDER/COMBINER</b>	
		PART NO.: <b>PLH4-26</b>	
DRAWN:	DATE:	CAGE CODE:	SIZE:
Paiboon Luekhamhan	02-03-2011	OD2L5	N/A
APPROVED:	DATE:	REV:	DWG NO.:
T. Nguyen	02-03-2011	N/A	85328
		DO NOT SCALE THE DRAWING	

4 3 2 1