


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

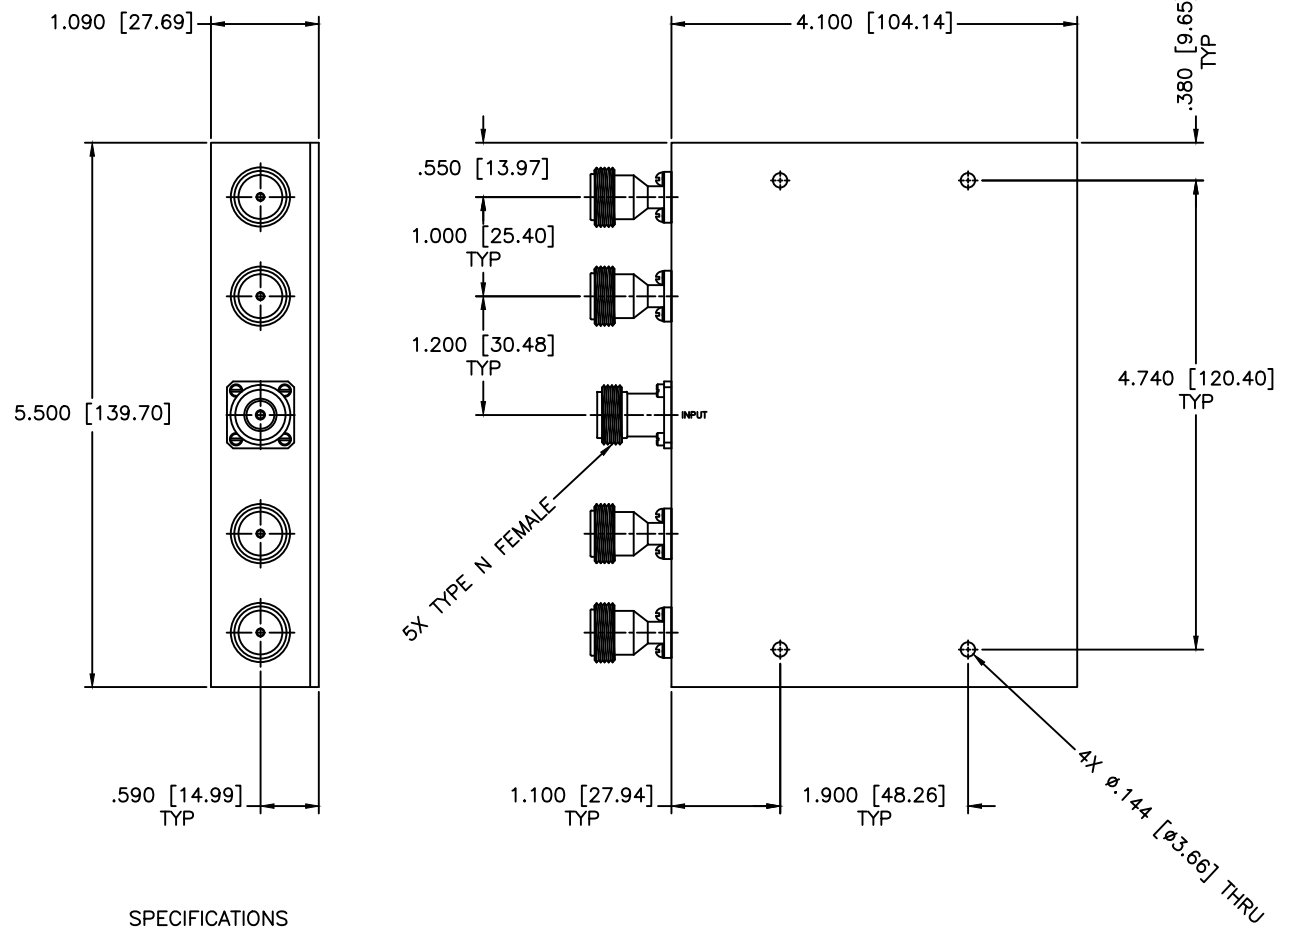

SPECIFICATIONS

Frequency Range: 1850–2000 MHz
 VSWR: 1.30:1 Max.
 Insertion loss: 0.5dB Max.
 Isolation: 20dB Min.
 Phase Balance: ±6 Deg. Max.
 Amplitude Balance: ±0.5dB Max.
 Power: 50 W CW

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-0110 http://www.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:		7-4WAY POWER DIVIDER/COMBINER		SHEET: N/A
DRAWING: Paiboon Luekhamhan		DATE: 07-25-2011		PART NO. PLH4-36/NF		
APPROVED: T. Nguyen		DATE: 07-25-2011		CAGE CODE: OD2L5		SIZE: N/A
				REV: N/A		DWG NO. 85787
				DO NOT SCALE THE DRAWING		