


| REVISIONS | | | | |
|-----------|-----|-------------|------|----------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |
| | | | | |

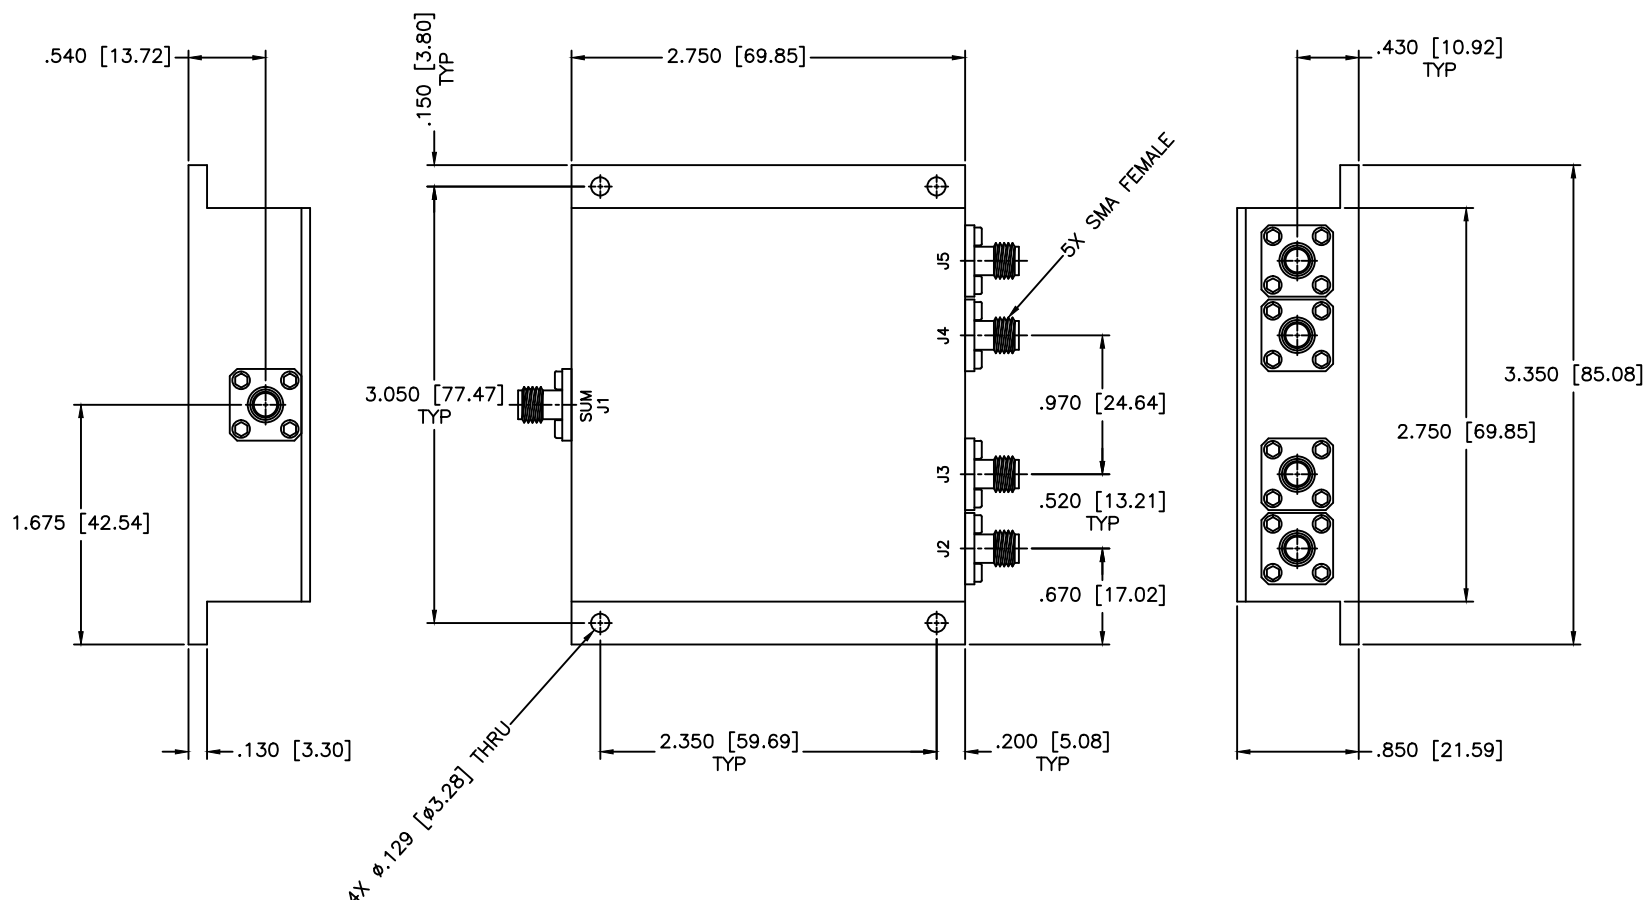

SPECIFICATIONS

Frequency Range: 20–3000 MHz
 Insertion Loss: 1.2dB Max.
 Isolation: 15dB Min.
 VSWR: 1.50:1 Max.
 Power: 50 W CW
 Amplitude Balance: ±0.6dB Max.
 Phase Balance: ±5 Deg. Max.

| | | | |
|---|---|--------------------------------|-------------------|
| MATERIAL: | DRAWING TITLE: 4-WAY POWER DIVIDER/COMBINER | SCALE: | N/A |
| | | SHEET: | N/A |
| DRAWN: Paiboon Luekhamhan | DATE: 06/05/2018 | PART NO.: PLH4-38 | |
| | | DRAWING NO.: PLH4-38 | |
| APPROVED: T. Nguyen | DATE: 06/05/2018 | CAGE CODE: OD2L5 | SIZE: N/A |
| REVISIONS: | | REV: A | DWG NO.: 86189 |
| UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.1 ± 0.005 ANGLE: ± 1/2° | | DO NOT SCALE THE DRAWING | |