


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

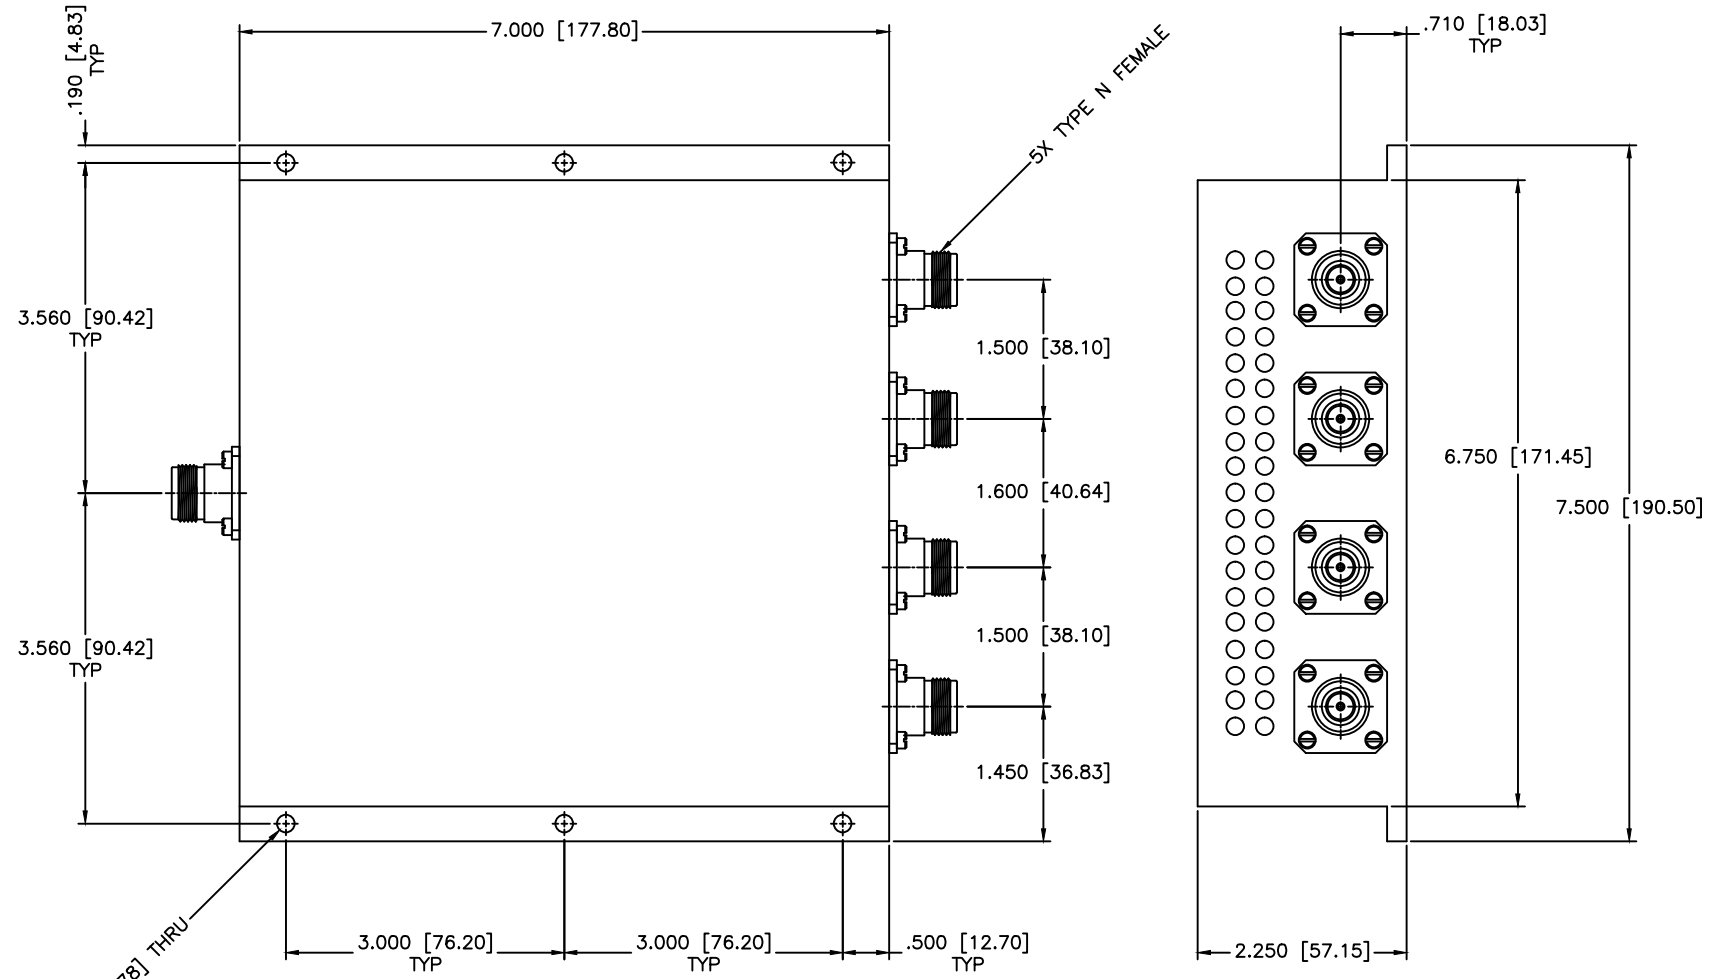

6X  $\phi$ .188 [ $\phi$ 4.78] THRU

5X TYPE N FEMALE

SPECIFICATIONS	
Frequency Range:	100–500 MHz
Insertion Loss:	0.50dB Max.
Isolation:	20dB Min.
Power:	1,200 W CW
Amplitude Balance:	$\pm 0.25$ dB Max.
VSWR:	1.40:1 Max.
Phase Balance:	$\pm 5$ Deg Max.

MATERIAL:	DRAWING TITLE: <b>4-WAY POWER DIVIDER</b>	SCALE:	N/A
		SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$	PART NO.: <b>PLH4-8</b>	DRAWING TITLE: <b>4-WAY POWER DIVIDER</b>	
		PART NO.: <b>PLH4-8</b>	
DRAWN: Paiboon Luekhamhan	DATE: 01-26-2007	CAGE CODE: OD2L5	SIZE: C
APPROVED: T. Nguyen	DATE: 01-26-2007	REV: N/A	DWG NO.: 82758
<small>THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE DISCLOSED OUTSIDE YOURS. PERMISSION FOR OTHER COMMUNICATION LABORATORIES INC. (MCL) SHALL BE OBTAINED.</small>		DO NOT SCALE THE DRAWING	