


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

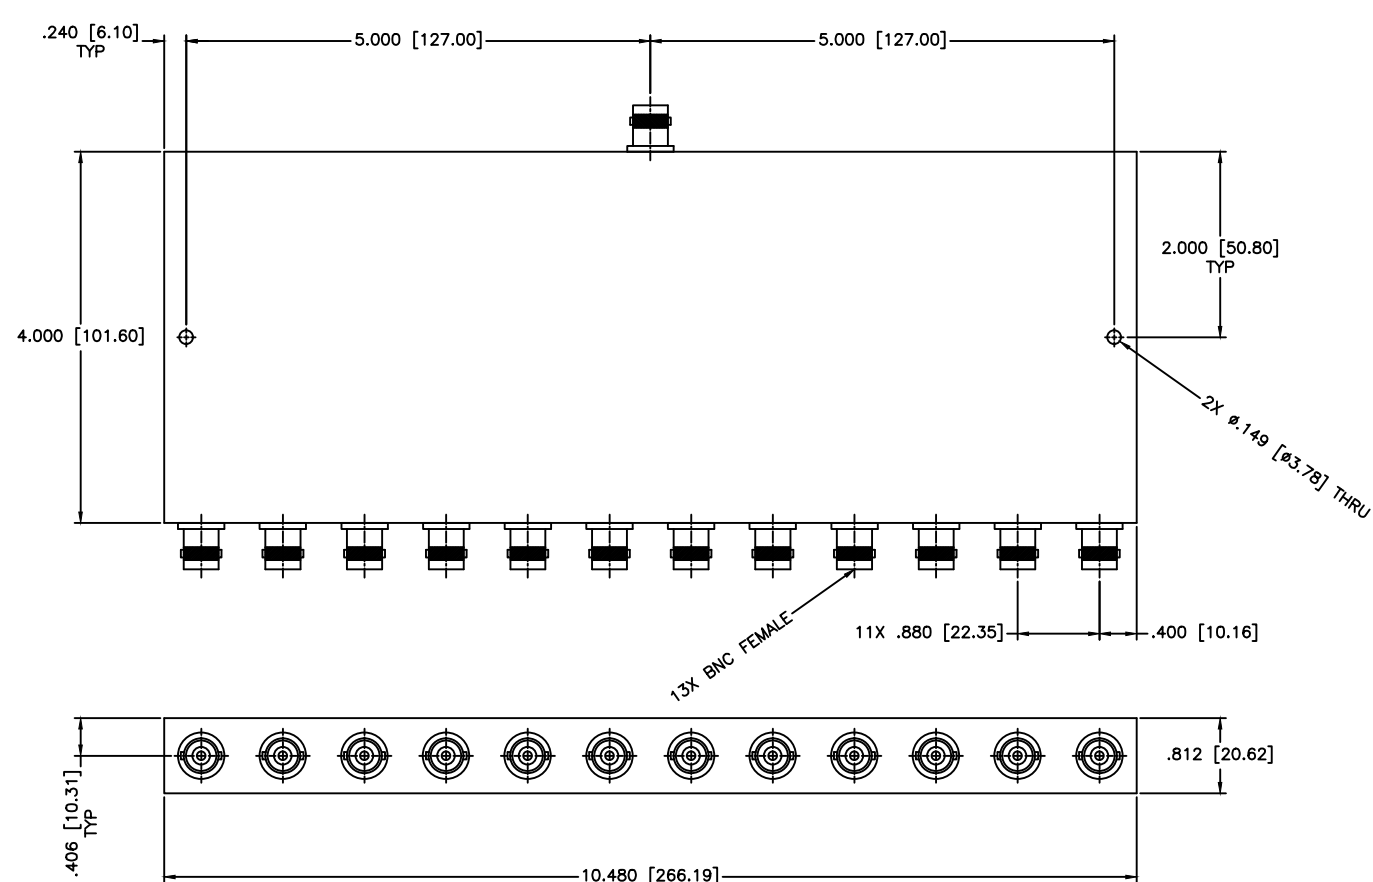

**SPECIFICATIONS**

Frequency Range: 500–2000 MHz  
 Insertion Loss: 2.5dB Max.  
 Isolation: 14dB Min.  
 VSWR: 1.90:1 Max.  
 Amplitude Balance: ±1.5dB  
 Phase Balance: ±12 Deg.

MATERIAL:		 <b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.015 ANGLE: ± 1/2°	DRAWING TITLE: <b>12-WAY POWER DIVIDER</b>	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: <b>PM12-3/BF</b>	
DRAWN: Paiboon Luekhamhan	DATE: 06-19-2018	 THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5
APPROVED: T. Nguyen	DATE: 06-19-2018		SIZE:	N/A
			REV:	N/A
			DWG NO.:	86745
			DO NOT SCALE THE DRAWING	