REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

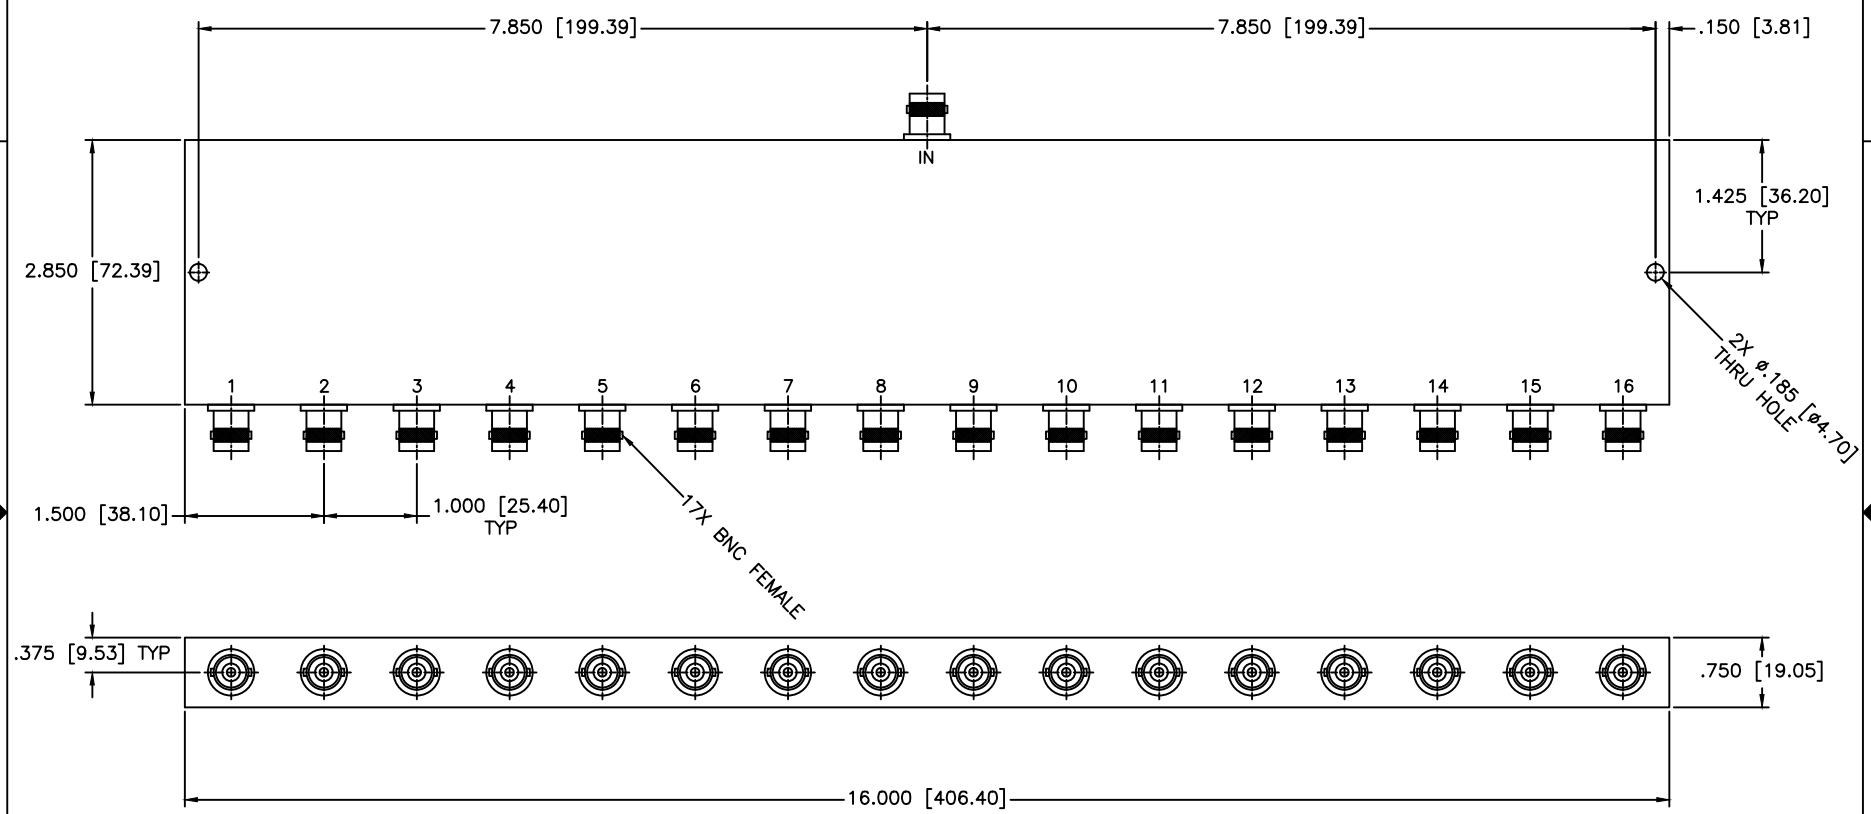

SPECIFICATIONS

Frequency Range:	950–1450 MHz
Insertion Loss:	14.2dB Max.
Isolation:	15dB Min.
Amplitude Balance:	±0.75dB Max.
VSWR In/Out:	1.70:1/1.60:1 Max.
Phase Balance:	±12 Deg. Max.

MCLI — MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-0116
http://www.MCLI.COM

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°

DRAWING TITLE: 16–WAY POWER DIVIDER

PART NO.: PM16–40/BF

MATERIAL:	SCALE: N/A	SHEET: N/A				
DRAWN: Paiboon Luekhamhan	DATE: 04–09–2009	CAGE CODE: 0D2L5	SIZE: N/A	REV: A	DWG NO.: 84141
APPROVED: T. Nguyen	DATE: 04–09–2009		DO NOT SCALE THE DRAWING		