


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

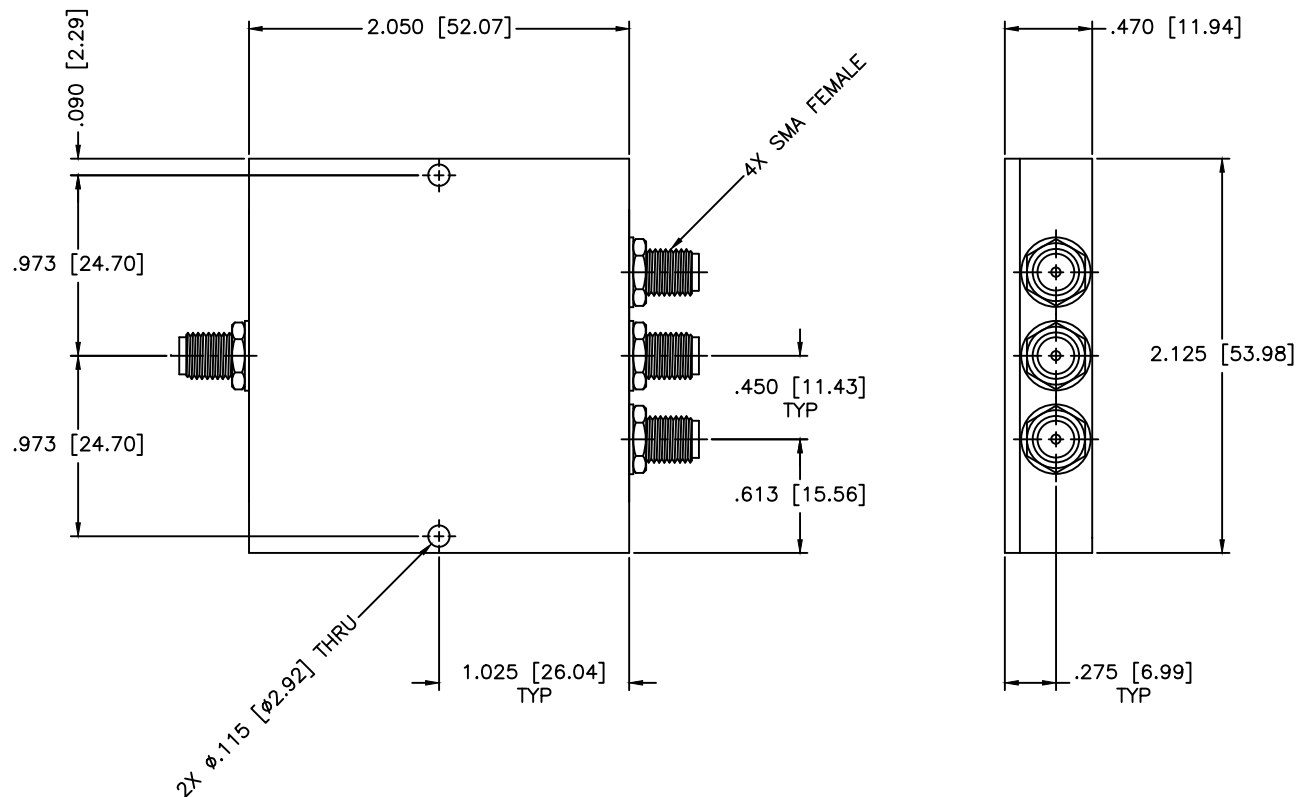

SPECIFICATIONS

Frequency Range: 1700–1900 MHz
 Insertion Loss: 0.6dB Max.
 Isolation: 16dB Min.
 VSWR Input/Output: 1.40:1/1.35:1 Max.
 Phase Balance: ± 7 Deg. Max.
 Amplitude Balance: 0.3dB Max.

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 3-WAY POWER DIVIDER			
		PART NO. PM3-3L			
DRAWN: Paiboon Luekhamhan		DATE: 09-10-1998		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 09-10-1998		SIZE: A REV: N/A DWG NO.: 81154	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	
		THIRD ANGLE PROJECTION 			