



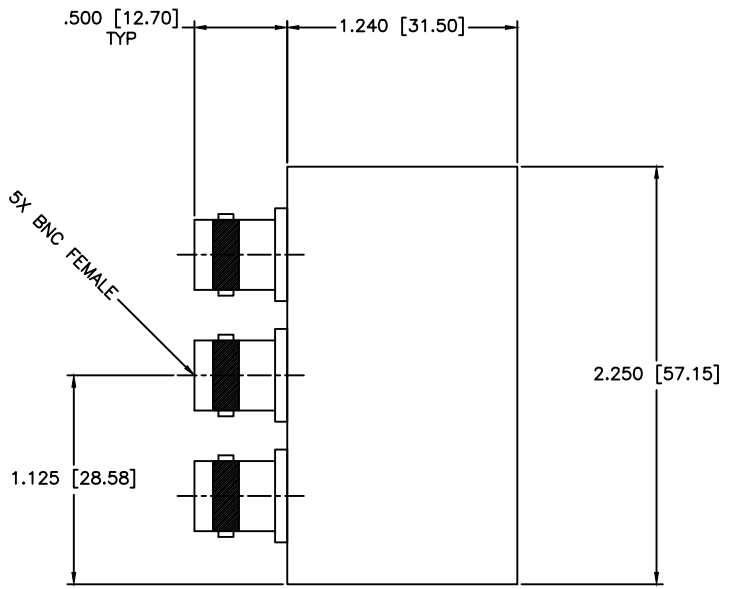

REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

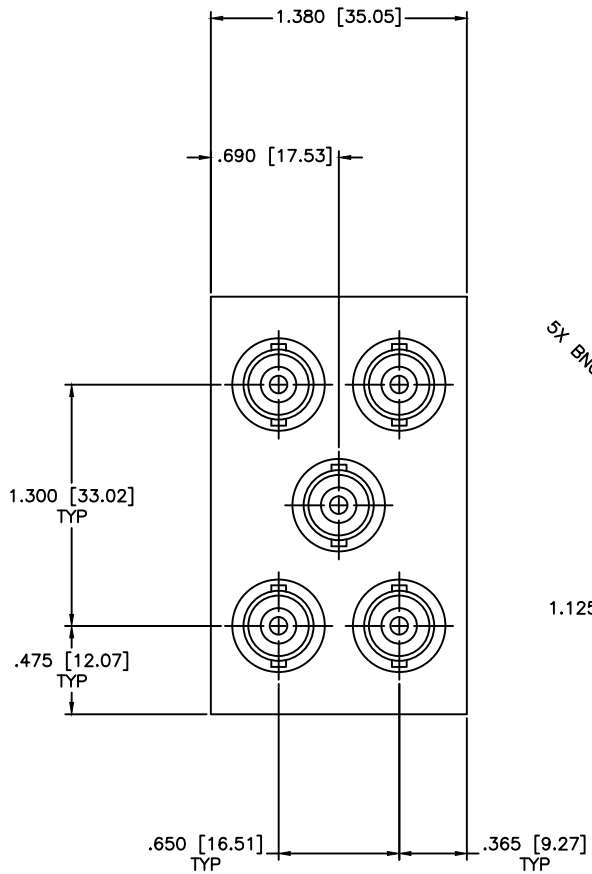

SPECIFICATIONS

Frequency Range: 1–200 MHz
 VSWR: 1.40:1 Max.
 Insertion Loss: 0.6dB Max. (Above 6dB)
 Isolation: 19dB Min.
 Phase Balance: ±10 Deg. Max.
 Amplitude Balance: ±0.3dB Max.
 Impedance: 75 Ohms

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 05-11-2006
APPROVED: T. Nguyen	DATE: 05-11-2006

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: <h3>4-WAY POWER DIVIDER</h3>		PART NO. <h3>PM4-12-75/BF/A</h3>	
CAGE CODE: OD2L5	SIZE: A	REV: N/A	DWG NO. 82546
DO NOT SCALE THE DRAWING			

