



REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

4X ϕ .110 [2.80] THRU

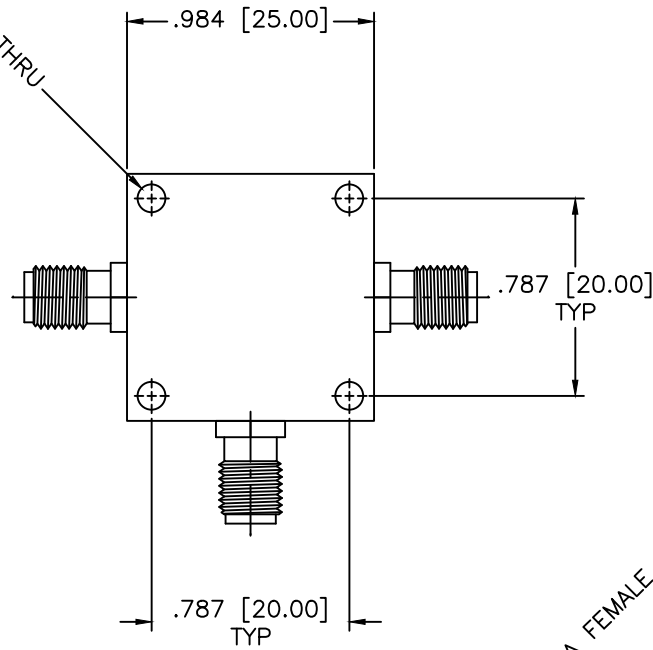


3X SMA FEMALE

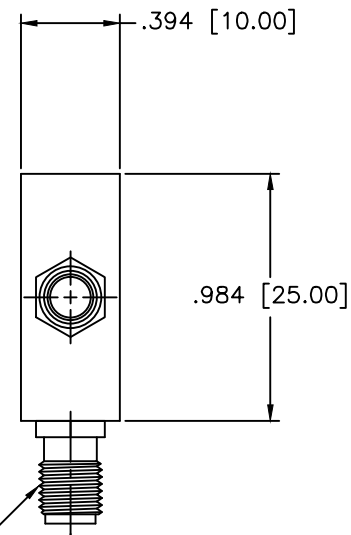

SPECIFICATIONS

Frequency Range: DC–10 GHz
Insertion Loss: 6 ± 1.5 dB Max.
VSWR: 1.40:1 Max.
Amplitude Balance: ± 0.7 dB Max.
Power: 1W CW
Operating Temperature Range: -40°C to $+85^{\circ}\text{C}$

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.com		SCALE:		N/A							
				SHEET:		N/A							
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.019 ANGLE: ±1/2°		DRAWING TITLE:									
				2-WAY POWER DIVIDER									
				PART NO.									
				PR2-010									
DRAWN:		DATE:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:		SIZE:		REV:		DWG. NO.	
Paiboon L.		01-16-2026				OD2L5		N/A		N/A		87383	
APPROVED:		DATE:		THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING							
T. Nguyen		01-16-2026											