


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

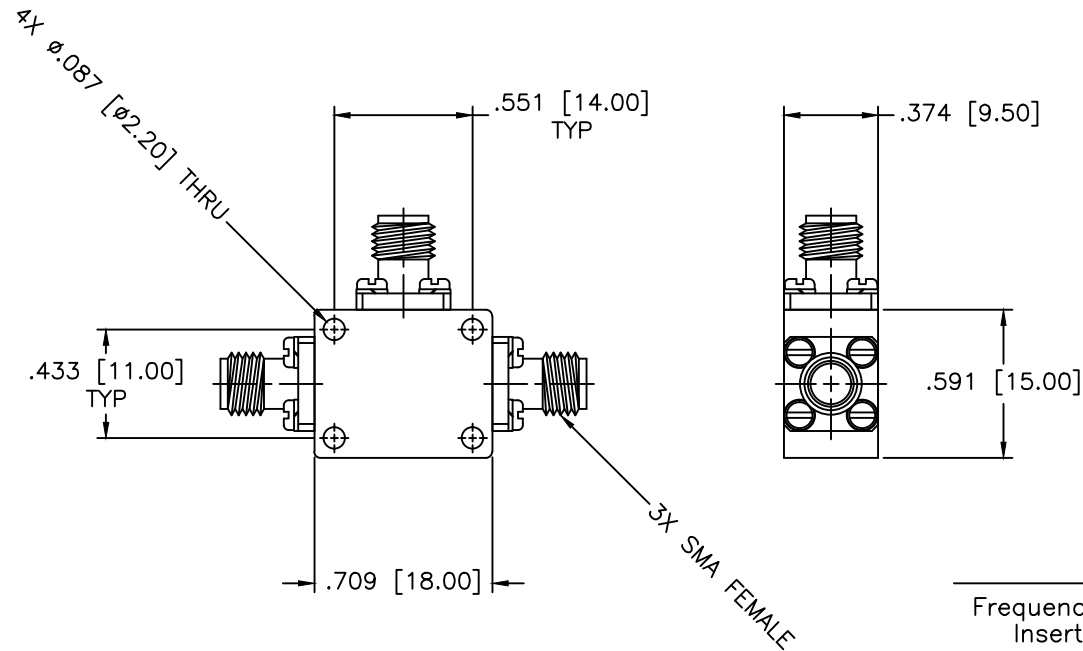

SPECIFICATIONS

Frequency Range: DC–26.5 GHz
 Insertion Loss: 7.8dB Max.
 VSWR: 1.50:1 Max.
 Phase Balance: ± 5 dB Max.
 Amplitude Balance: ± 0.5 dB Max.
 Power: 1W CW
 Operating Temperature Range: -40°C to $+85^{\circ}\text{C}$

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.com		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.019 ANGLE: $\pm 1/2^{\circ}$		DRAWING TITLE: 2-WAY POWER DIVIDER			
		PART NO. PR2-026			
DRAWN: Paiboon L. DATE: 01-16-2026	APPROVED: T. Nguyen DATE: 01-16-2026	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI) THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	SIZE: N/A DO NOT SCALE THE DRAWING
		REV: N/A	DWG. NO. 87382		