


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

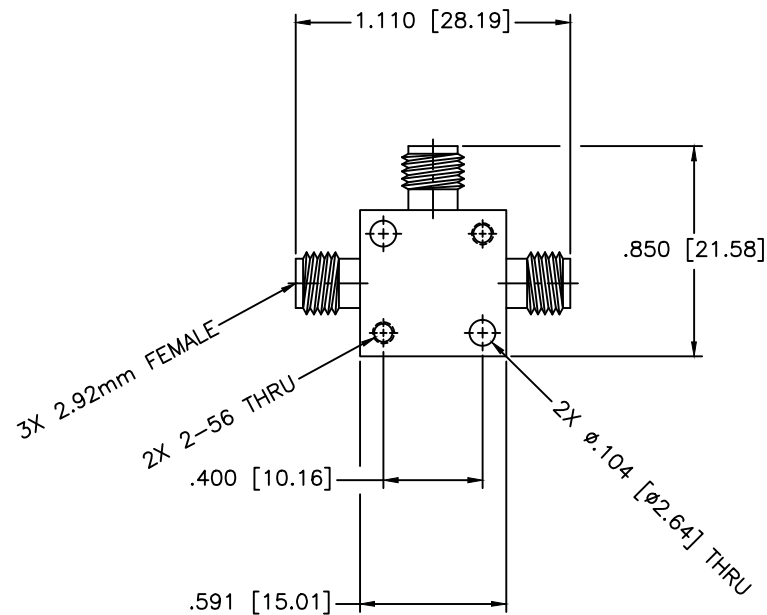

**SPECIFICATIONS**

Frequency Range: 0–40 GHz  
 VSWR: 1.70:1 Max.  
 Phase Tracking: < 2 Deg.  
 Amplitude Tracking: < 0.25dB  
 Power: 1W CW, 1kW Peak.  
 5 uSEC pulse width, .05% duty cycle, input only.  
 Insertion Loss: 6dB Nom. 6.5dB Max.  
 Between Input & Outputs  
 Temperature: –55°C to +85°C

			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 01-25-2016	DRAWING TITLE: 2-WAY POWER DIVIDER, 2.92MM FEMALE		
APPROVED: T. Nguyen		DATE: 01-25-2016	PART NO. PR2-040		
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 	CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
			DWG NO. 87021		DO NOT SCALE THE DRAWING