


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

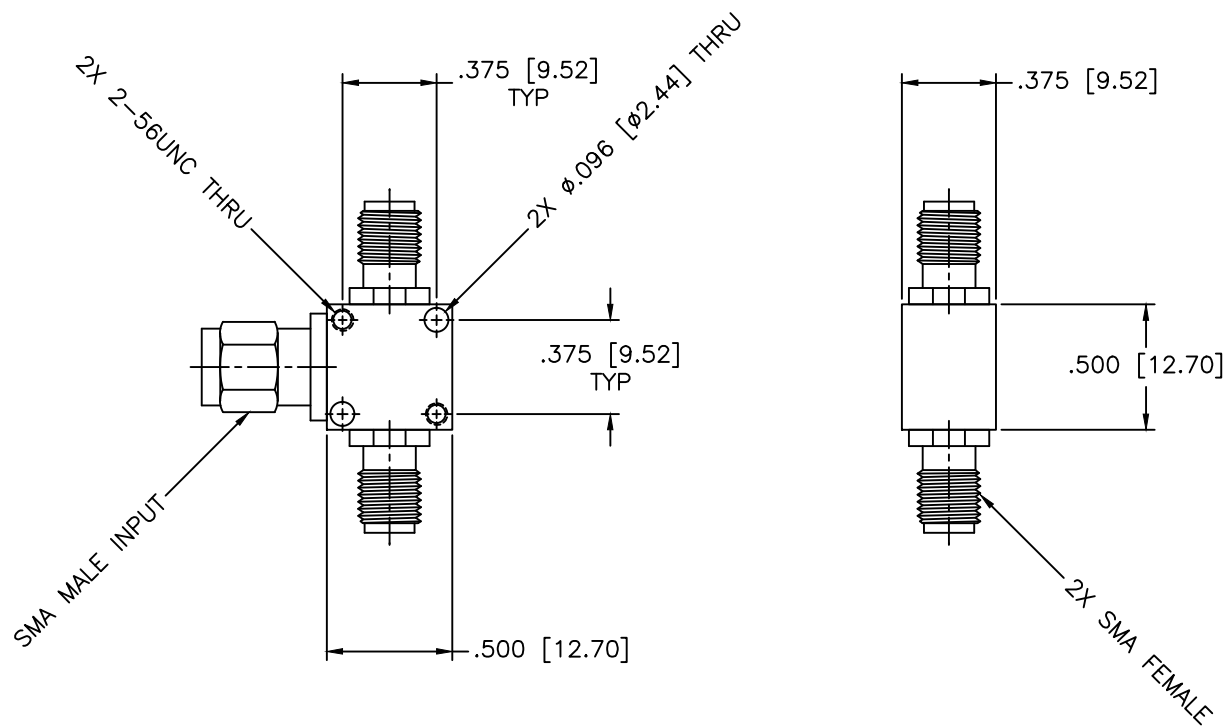

SPECIFICATIONS

FREQUENCY RANGE: DC-6000 MHz
 INSERTION LOSS: 0.5dB Max.
 VSWR: 1.25:1 Max.
 POWER HANDLING: 1 Watt
 PHASE BALANCE: ±3 Deg. Max.
 AMPLITUDE BALANCE: ±0.3dB Max.
 IMPEDANCE: 50 Ohms

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A			
			SHEET:	N/A			
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 2-WAY POWER DIVIDER				
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PR2-06/MI				
DRAWN: Paiboon Luekhamhan	DATE: 05-04-2022	THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5			
APPROVED: T. Nguyen	DATE: 05-04-2022		SIZE:	N/A	REV:	N/A	DWG NO.:
		DO NOT SCALE THE DRAWING					