
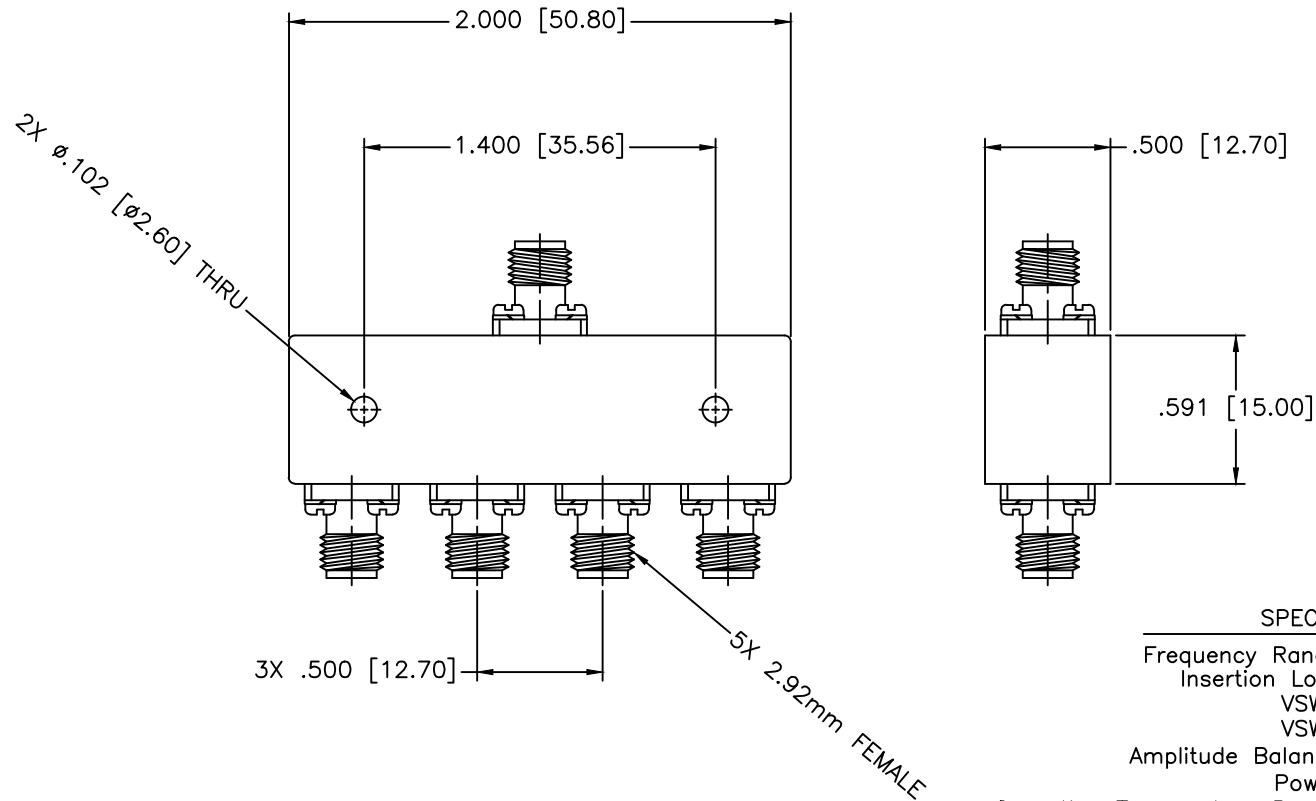


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: DC–40 GHz
 Insertion Loss: 16.8dB Max.
 VSWR: 2.00:1 Max.
 VSWR: 1.80:1 Min. (DC–26.5GHz)
 Amplitude Balance: ± 1.0 dB Max.
 Power: 1W CW
 Operating Temperature Range: -40°C to $+85^{\circ}\text{C}$

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.com		SCALE:		N/A							
				SHEET:		N/A							
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.019 ANGLE: ±1/2°		DRAWING TITLE: 4-WAY POWER DIVIDER									
				PART NO. PR4-2									
DRAWN: Paiboon L.		DATE: 01-20-2026		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:		SIZE:		REV:		DWG NO.	
APPROVED: T. Nguyen		DATE: 01-20-2026				OD2L5		N/A		N/A		87385	
				THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING							