
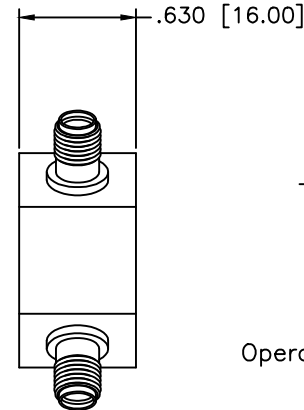


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

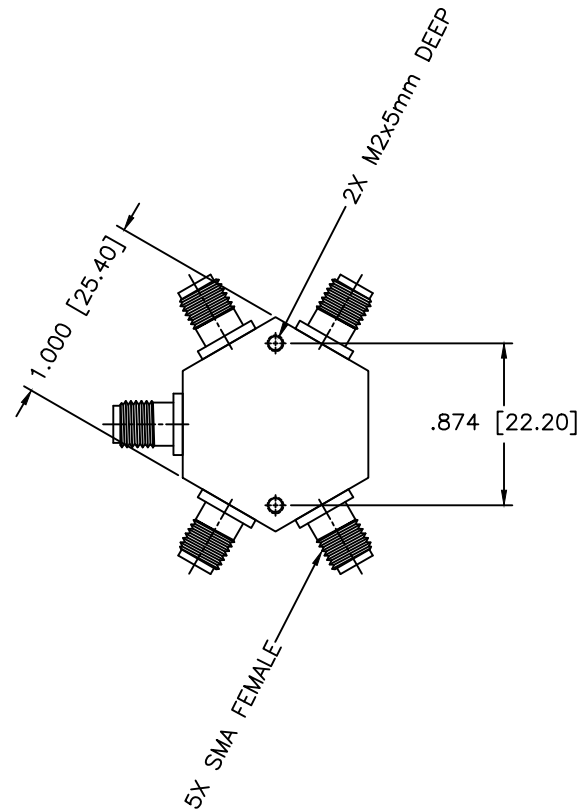

SPECIFICATIONS

Frequency Range: DC–6.0 GHz
 Isolation: 12dB Min.
 Insertion Loss: 14dB Max.
 VSWR: 1.60:1 Max.
 Power: 1W CW
 Operating Temperature: –40°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.com		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon L. DATE: 01-13-2026 APPROVED: T. Nguyen DATE: 01-13-2026		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.019 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 4-WAY POWER DIVIDER	
				PART NO. PR4-36	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	SIZE: A
				REV: N/A	DWG NO. 87378
DO NOT SCALE THE DRAWING					