


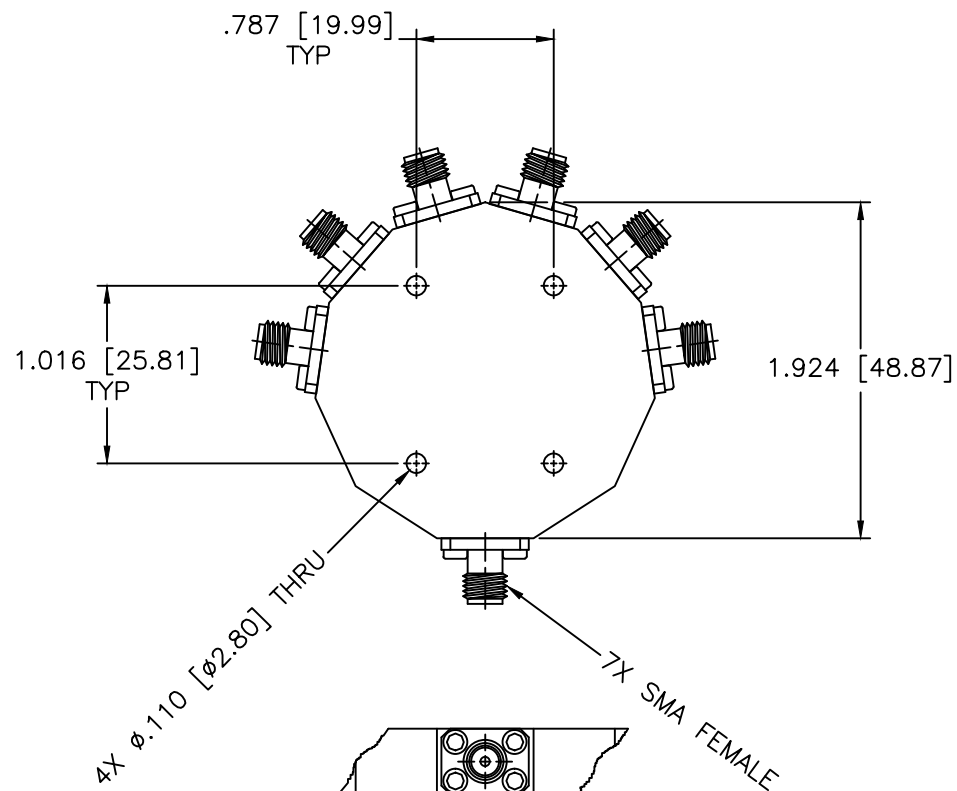

SPECIFICATIONS

Frequency Range: DC–6000 MHz

VSWR: 1.50:1 Max.

Insertion Loss: 15.5±1.5dB Max.

Power Handling: 1 Watt

Amplitude Balance: ±1.5dB Max.

Operating Temperature: –30°C to +60°C

MATERIAL: 		MCL MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.com		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.019 ANGLE: ±1/2°		DRAWING TITLE: 6-WAY POWER DIVIDERS			
		PART NO.: PR6-14			
DRAWN: Paiboon L.		DATE: 01-13-2026		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	
APPROVED: T. Nguyen		DATE: 03-13-2023		THIRD ANGLE PROJECTION 	
		CAGE CODE: OD2L5		SIZE: N/A	REV: N/A
				DWG NO. 86986	
DO NOT SCALE THE DRAWING					