
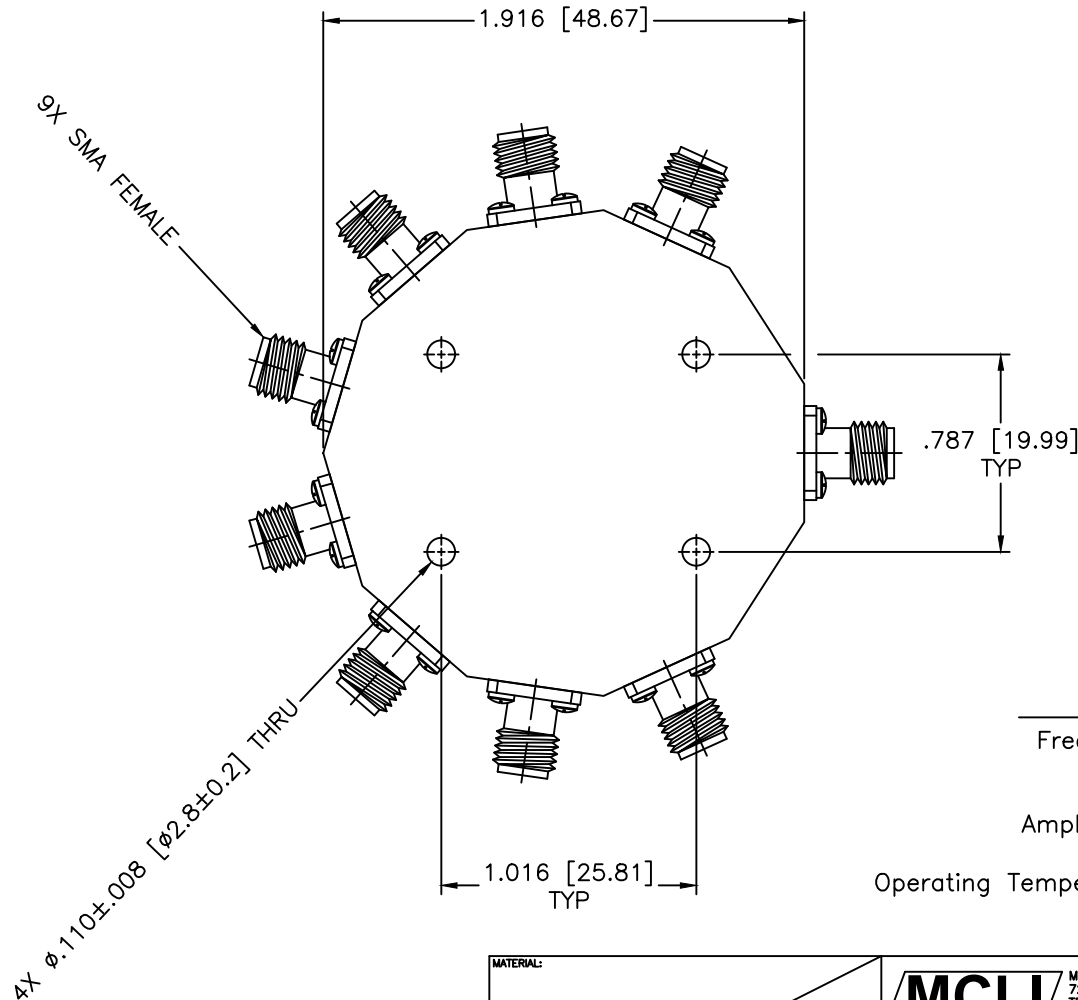


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED



SPECIFICATIONS

Frequency Range: DC–18 GHz
Insertion Loss: 19.5dB Max.
VSWR: 1.80:1 Max.
Amplitude Balance: ±1.5dB Max.
Power: 1W CW
Operating Temperature Range: –40°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.com		SCALE: N/A	
				SHEET: N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.019 ANGLE: ±1/2°		DRAWING TITLE: 8-WAY POWER DIVIDER	
				PART NO. PR8-3	
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	DWG NO.
Paiboon L.	01-21-2026			OD2L5	87390
APPROVED:	DATE:	THIRD ANGLE PROJECTION 		SIZE: N/A	REV: N/A
T. Nguyen	01-21-2026			DO NOT SCALE THE DRAWING	