


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

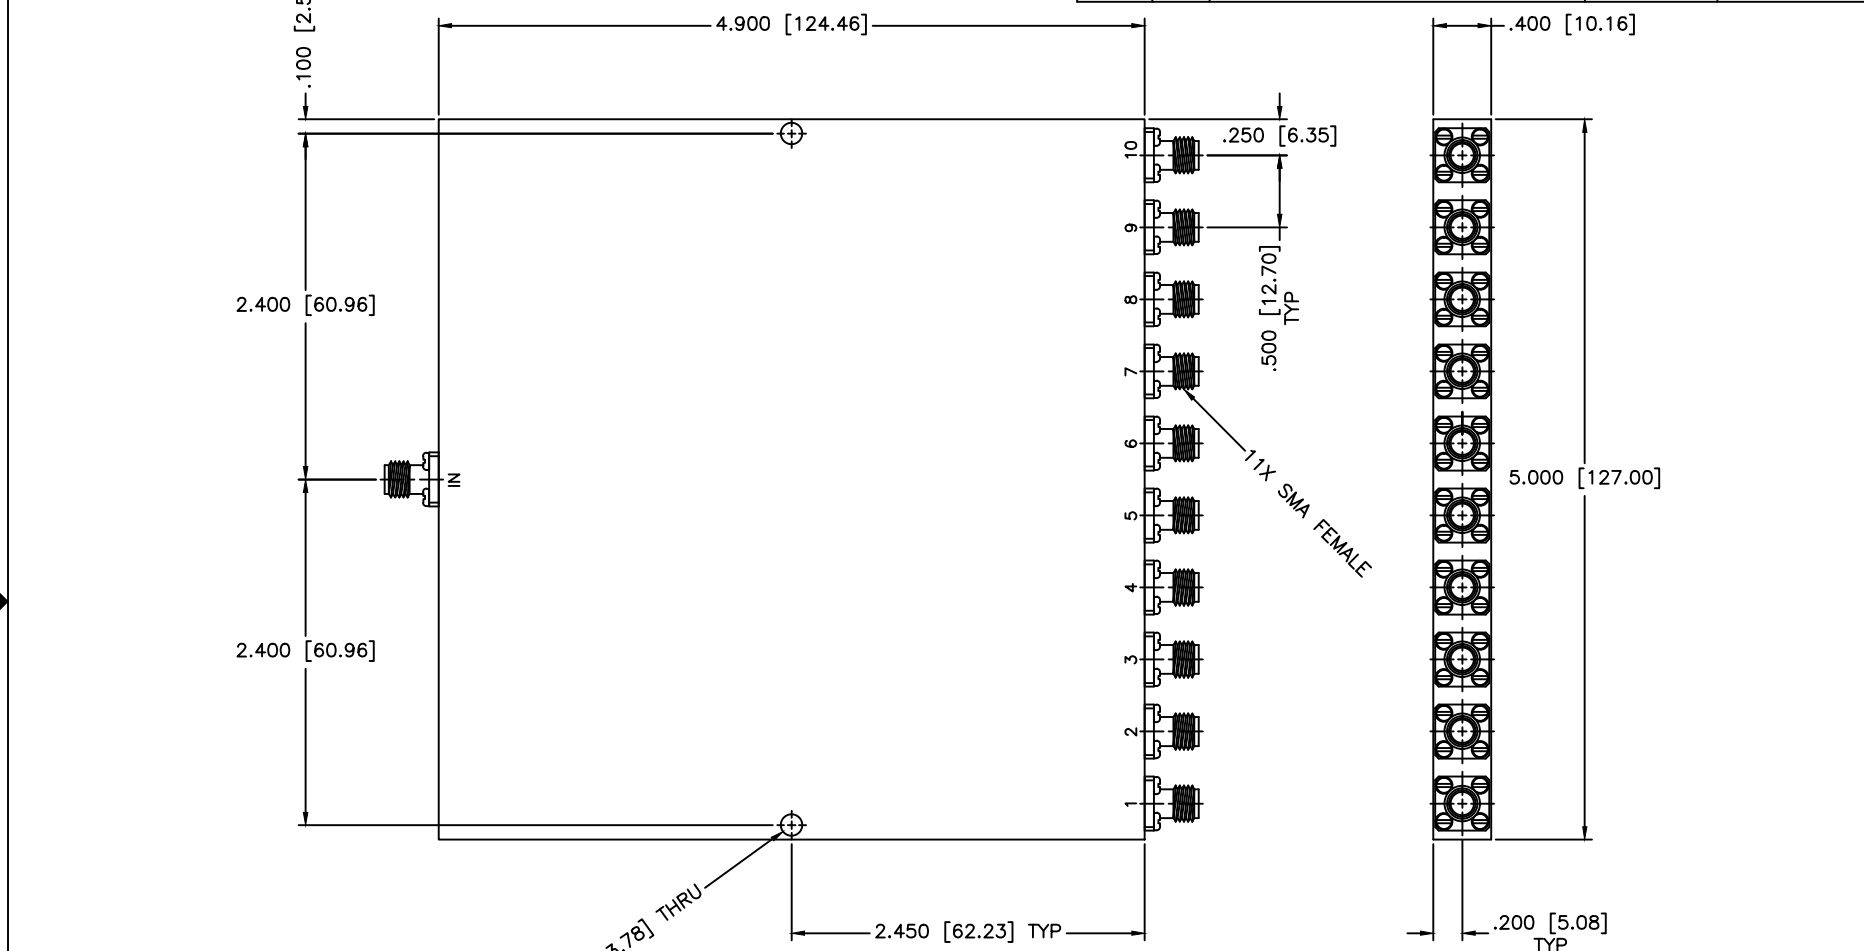

**SPECIFICATIONS**

Frequency Range: 8–12 GHz  
 Insertion Loss: 3.6dB Max.  
 Isolation: 11dB Min.  
 VSWR Input/Output: 2.00:1/1.90:1 Max.  
 Amplitude Balance: ±1.8dB Max.  
 Input Power: 10W (Load vswr @ 1.2)

2X Ø.149 [Ø3.78] THRU

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 09-07-2007
APPROVED: T. Nguyen	DATE: 09-07-2007

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 10-WAY POWER DIVIDER		PART NO. PS10-10	
CAGE CODE: OD2L5		SIZE: N/A	REV: N/A
DWG NO. 82933		DO NOT SCALE THE DRAWING	

