


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

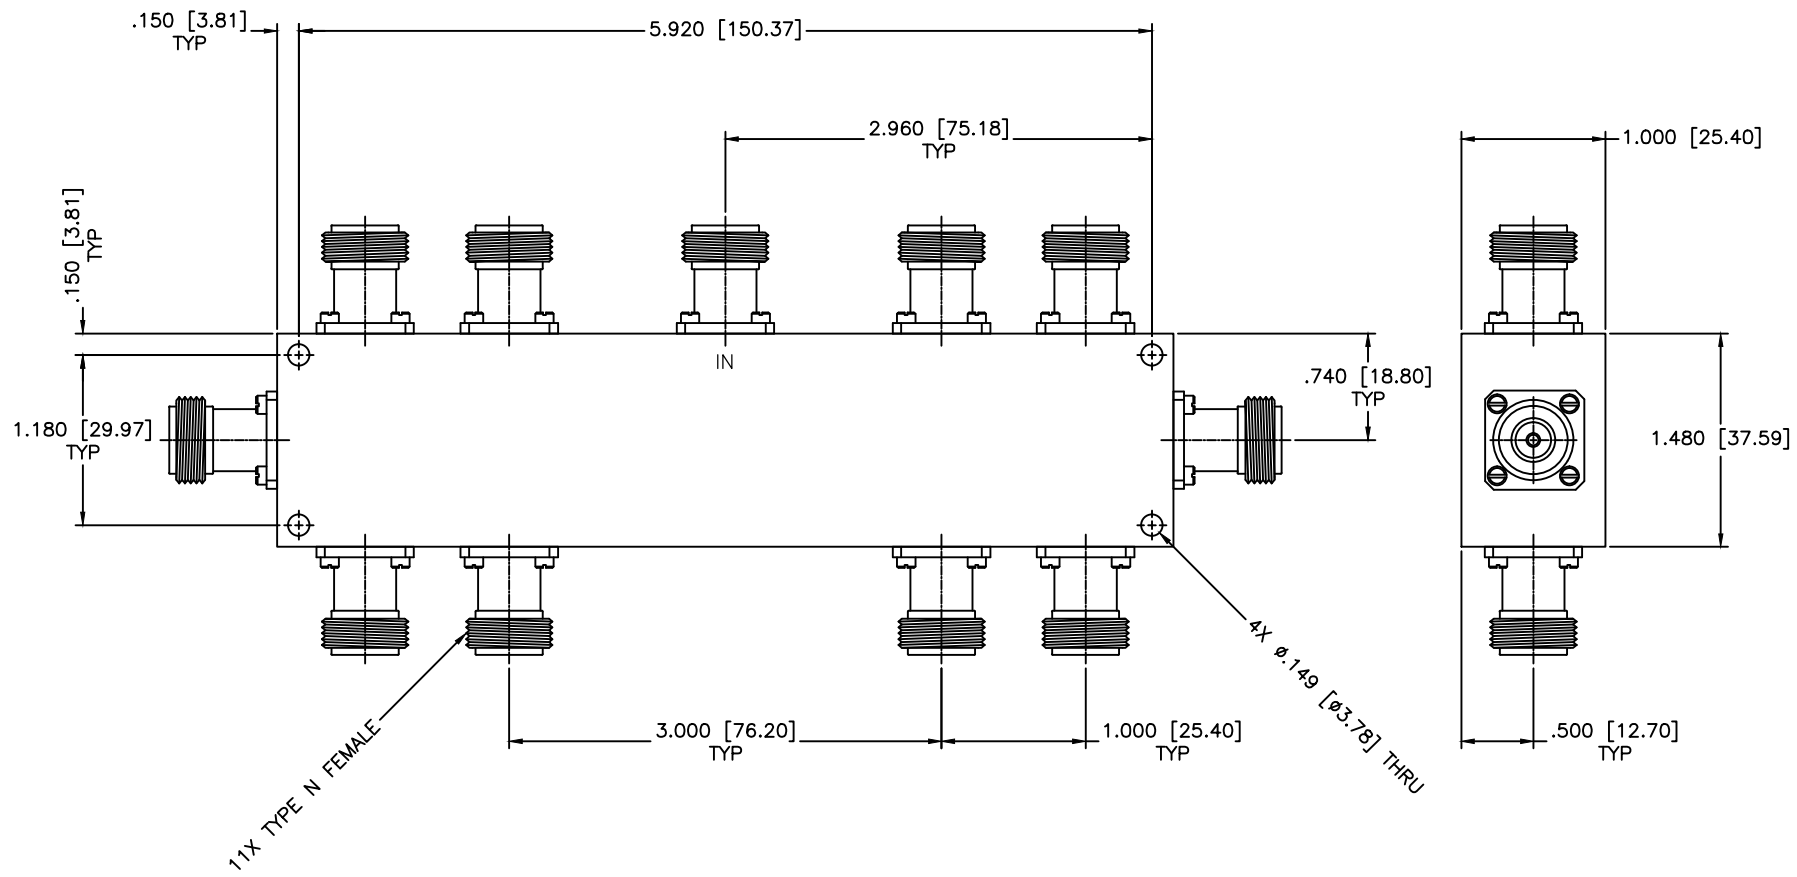

**SPECIFICATIONS**

Frequency Range: 4.2–4.4 GHz  
 Insertion Loss: 2.6dB Max.  
 Isolation: 14dB Min.  
 VSWR Input/Output: 1.60:1 Max.  
 Amplitude Balance: ±1.5dB Max.  
 Input Power: 20 Watts (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 08-30-1998		DRAWING TITLE: 10-WAY POWER DIVIDER	
APPROVED: Thien Nguyen		DATE: 08-30-1998		PART NO. PS10-16/NF	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: OD2L5	SIZE: N/A
		THIRD ANGLE PROJECTION 		REV: N/A	DWG NO. 86950
				DO NOT SCALE THE DRAWING	