


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

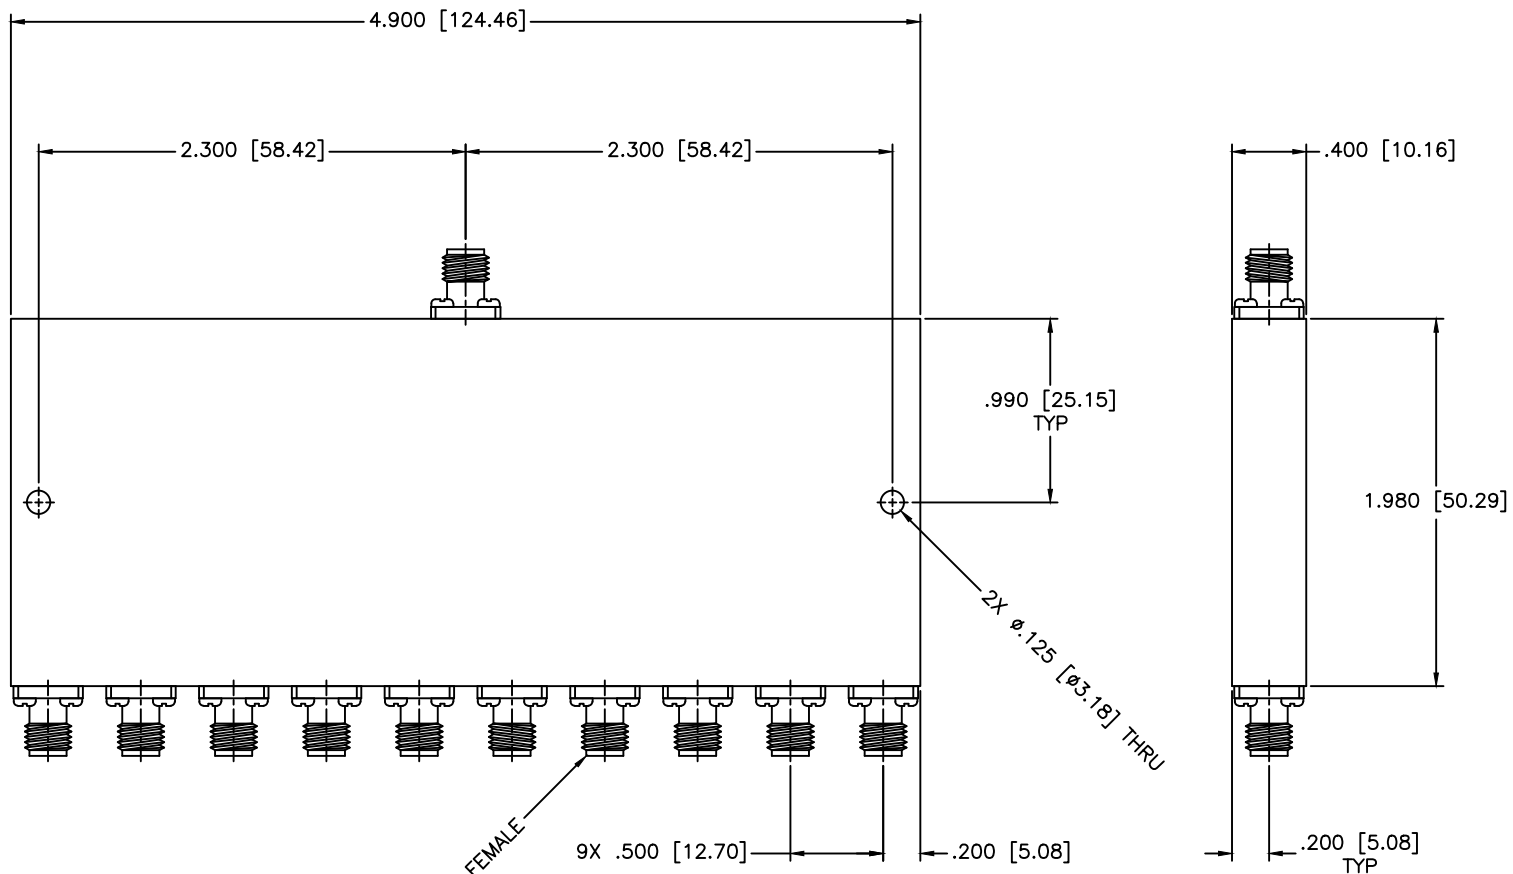

SPECIFICATIONS

Frequency Range: 18–26.5 GHz
 Insertion Loss: 5.8dB Max.
 Isolation: 10dB Min.
 VSWR Input/Output: 2.20:1 Max.
 Amplitude Balance: ±2.8dB Max.
 Input Power: 10W (Load vswr @ 1.2)

11X 2.92MM FEMALE

		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 10-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		PART NO.: PS10-21	
DATE: 04-13-2011		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		SIZE: N/A	REV: N/A
DATE: 04-13-2011		DWG NO.: 85620	
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)