


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

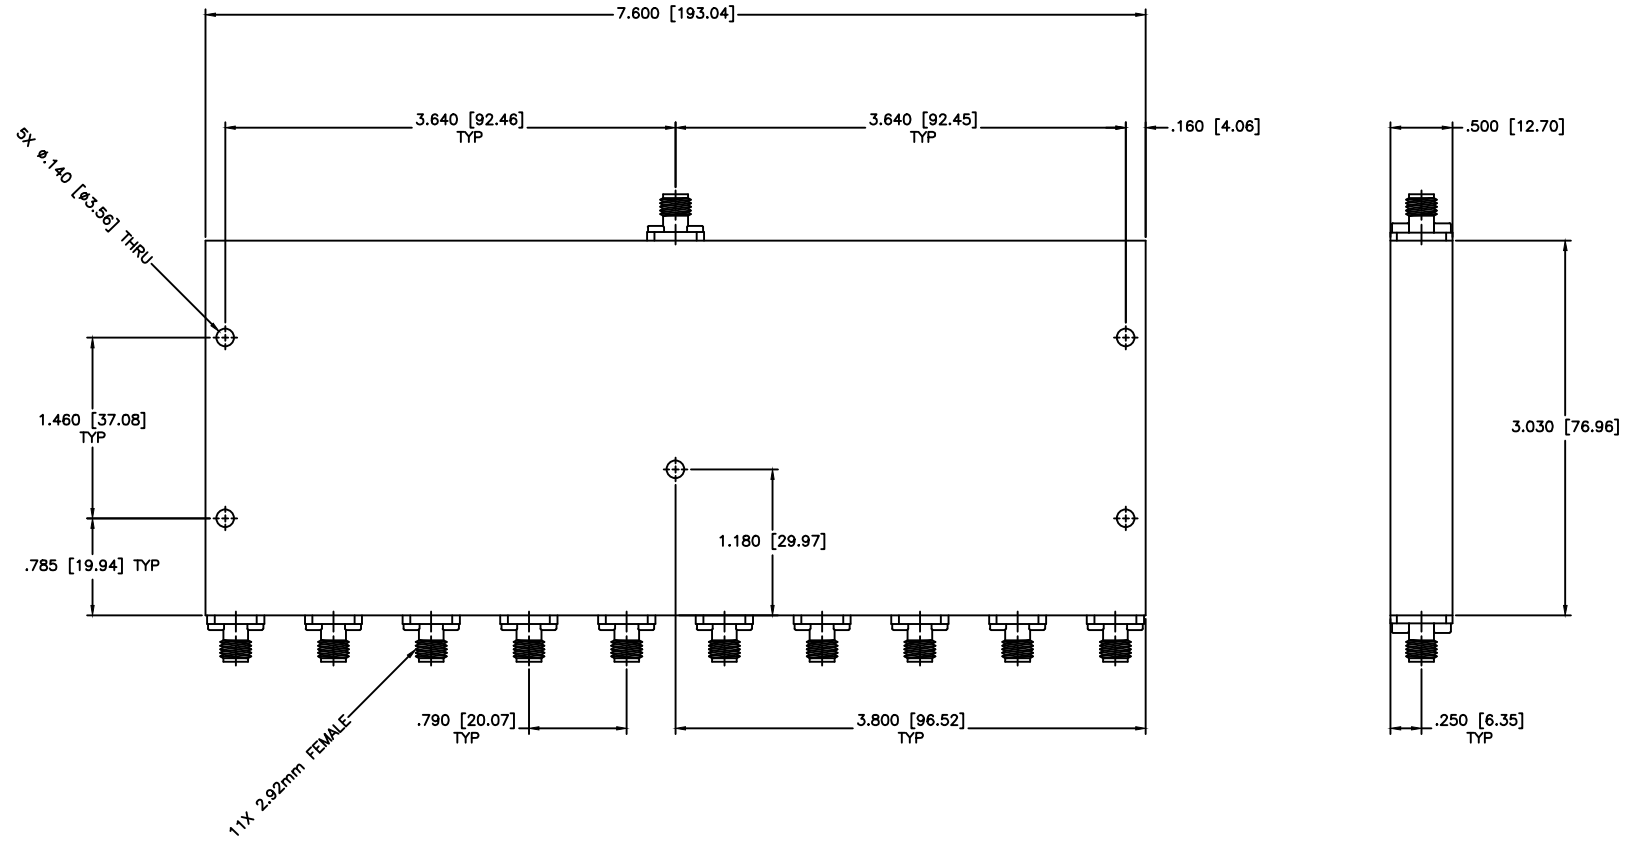

**SPECIFICATIONS**

- Frequency Range: 26.5–40 GHz
- Insertion Loss: 4.8dB Max.
- Isolation: 18dB Min.
- Phase Balance:  $\pm 12.0$ deg. Max.
- Amplitude Balance:  $\pm 1.0$ dB Max.
- VSWR: 1.70:1 Max.
- Power: 20W CW Max. 3kW Peak Max.
- Operational Temperature:  $-55^{\circ}$  to  $+105^{\circ}$  C

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^{\circ}$	DRAWING TITLE: <b>10-WAY POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan		DATE: 11-08-2017	PART NO. <b>PS10-23</b>	
APPROVED: T. Nguyen		DATE: 11-08-2017	CAGE CODE: OD2L5	SIZE: N/A REV: A DWG NO. 86693
		PROPRIETARY NOTICE: THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DO NOT SCALE THE DRAWING	

