


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

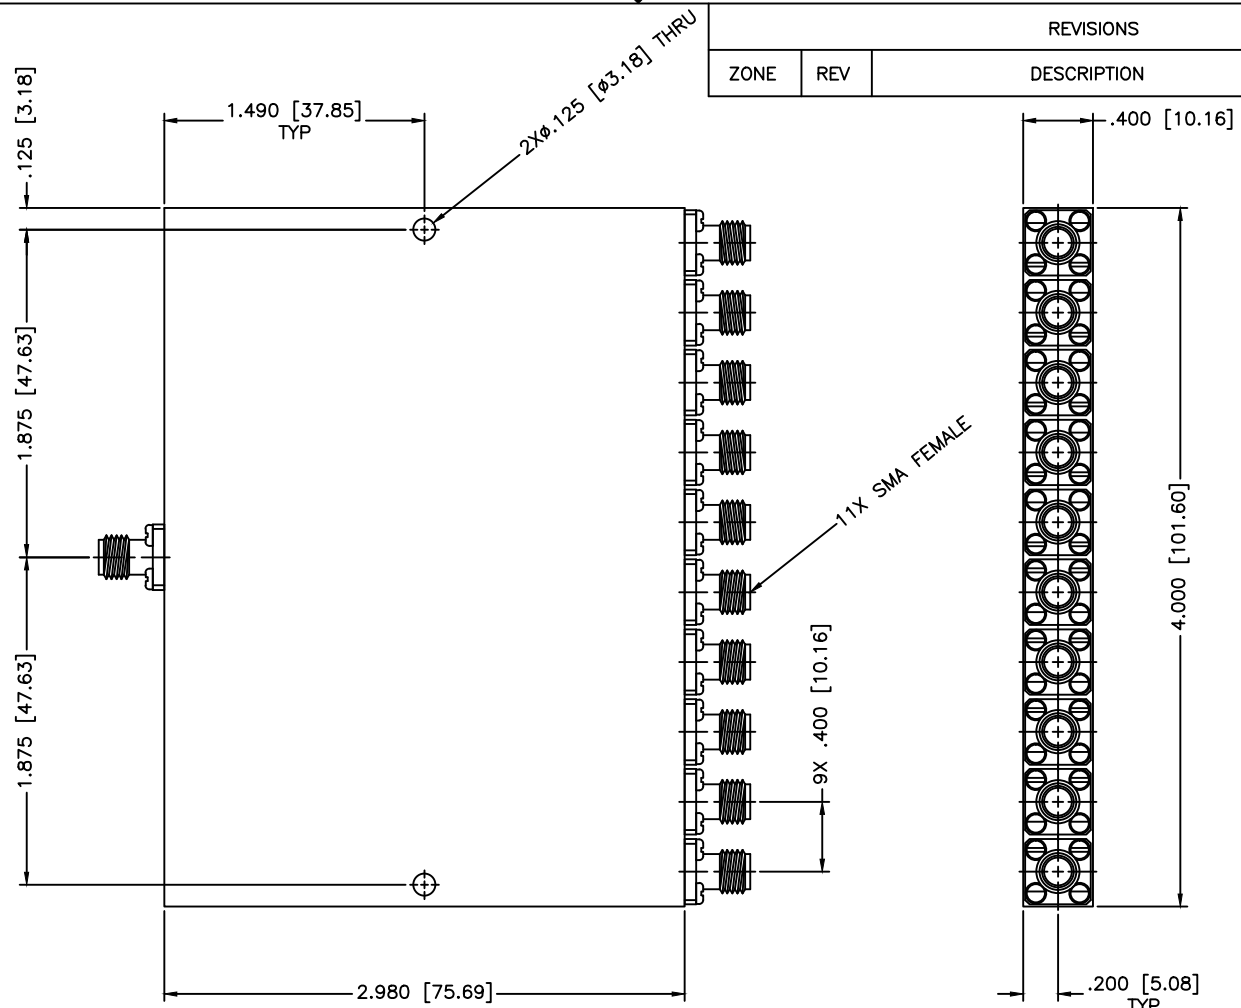

SPECIFICATIONS

Frequency Range: 3.625–6.4 GHz
 Insertion Loss: 2.2dB Max.
 Isolation: 14dB Min.
 Amplitude Balance: ±1.5dB
 VSWR: 1.90:1 Max.
 Input Power: 10W Max.

MATERIAL:	
DRAWN: Pai boon Luekhamhan	DATE: 10-18-2019
APPROVED: T. Nguyen	DATE: 10-18-2019



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCLI.COM>

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.015
 ANGLE: ±1/2°

DRAWING TITLE: 10-WAY POWER DIVIDER			
PART NO. PS10-24			
CAGE CODE: 0D2L5	SIZE: N/A	REV: N/A	DWG NO. 86817
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)