


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

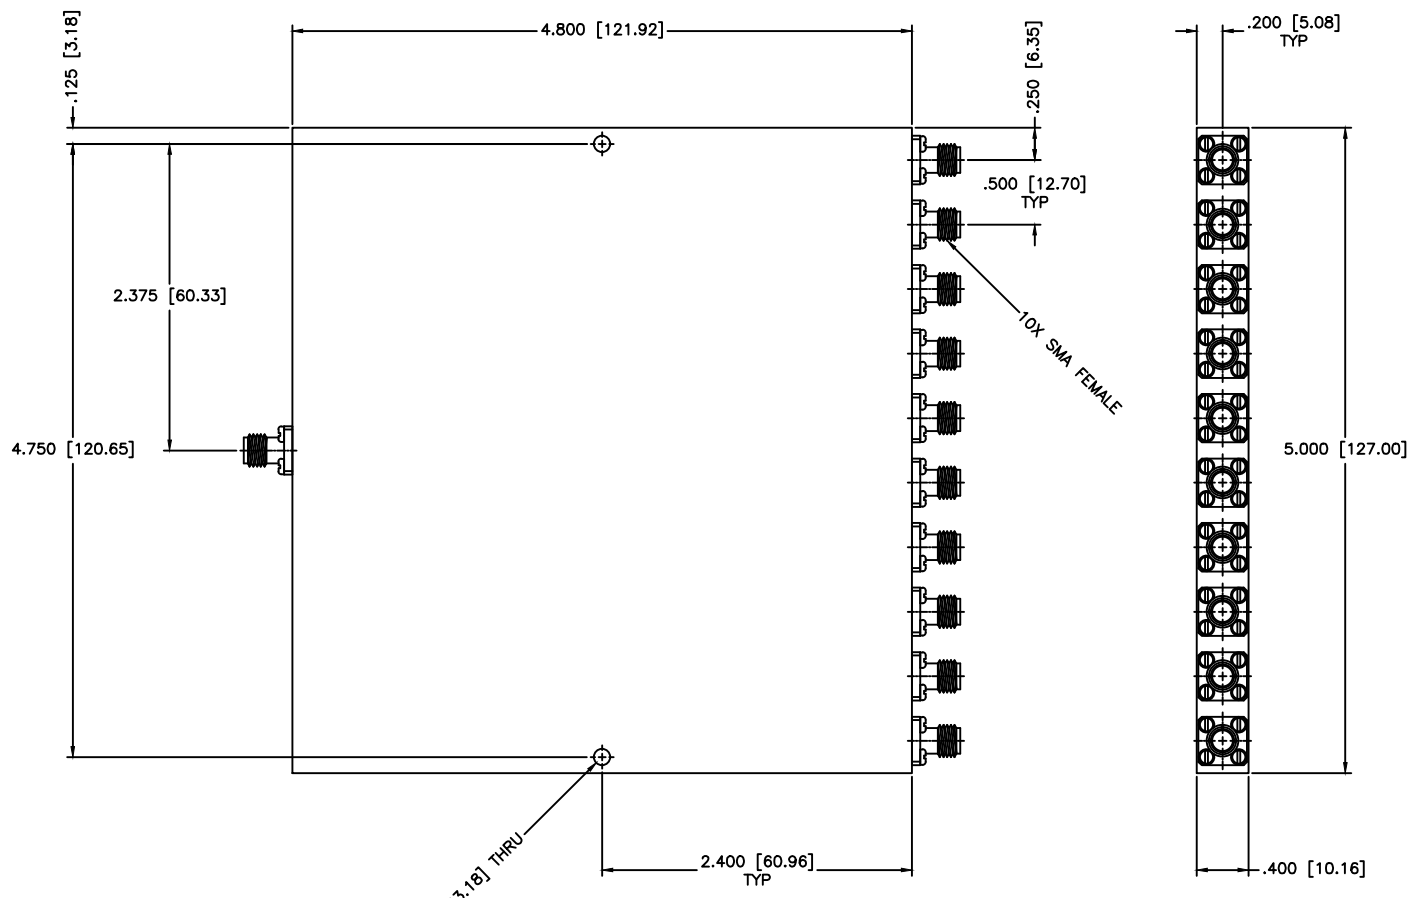

SPECIFICATIONS

Frequency Range: 1–3 GHz
 Insertion Loss: 2.5dB Max.
 Isolation: 17dB Min.
 Amplitude Balance: ±1.5dB Max.
 VSWR: 1.60:1 Max.
 Input Power: 10W (Load vswr @ 1.2)

2x 0.125 [3.18] THRU

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: 10-WAY POWER DIVIDER		PART NO.: PS10-31	
DRAWN: Paiboon Luekhamhan	DATE: 06-04-2019	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 86809
APPROVED: T. Nguyen	DATE: 06-04-2019	THIRD ANGLE PROJECTION 	DO NOT SCALE THE DRAWING

PROPERTY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)