


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

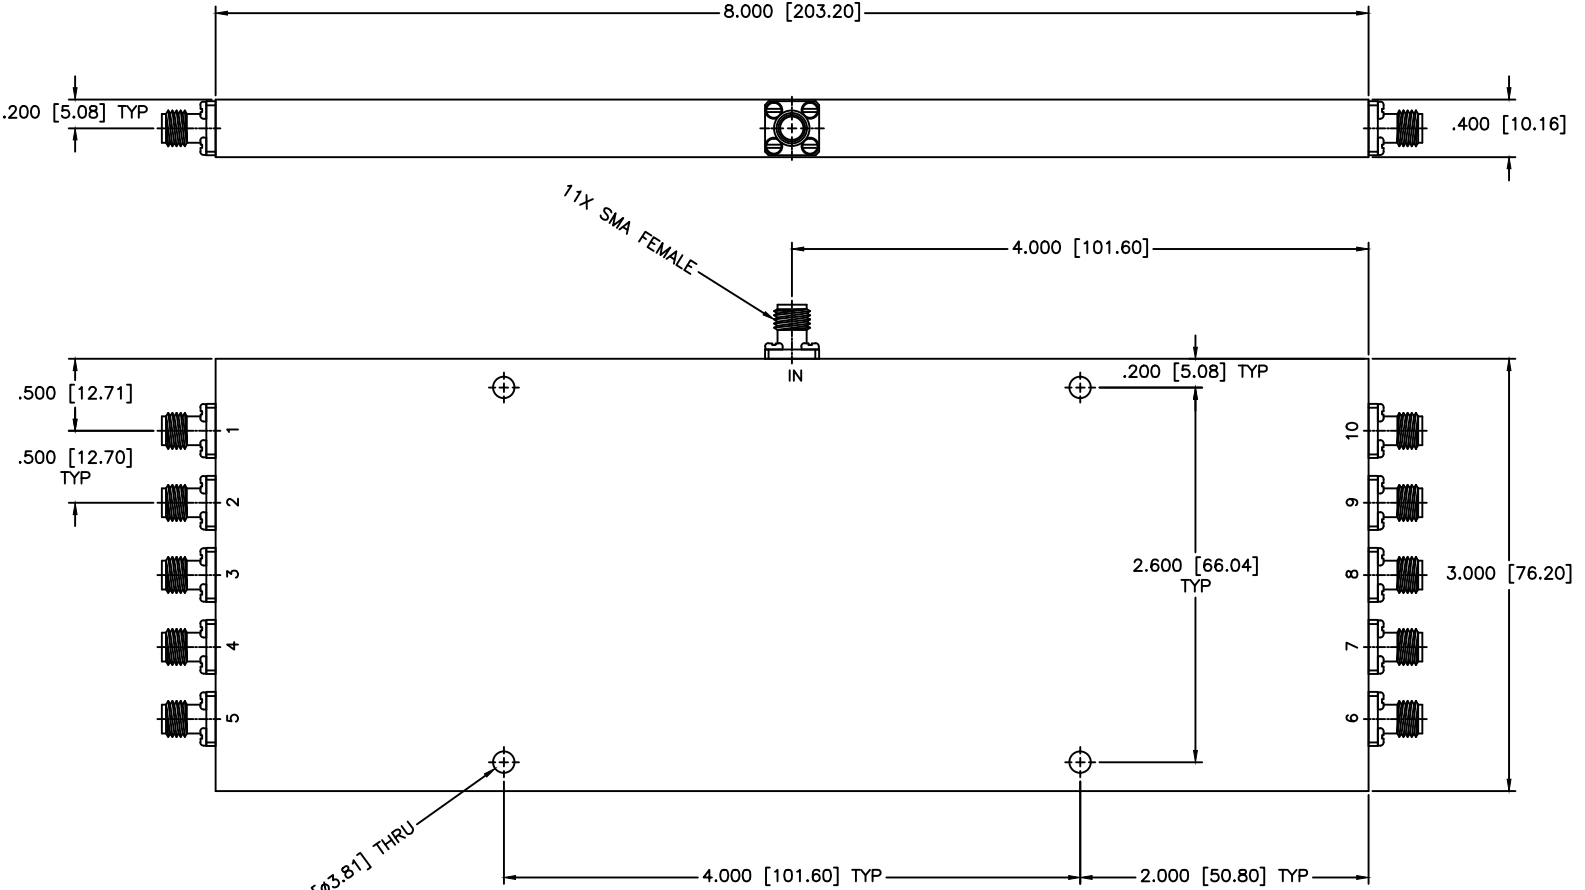

**SPECIFICATIONS**

Frequency Range: 2–5.2 GHz  
 Insertion Loss: 1.9dB Max.  
 Isolation: 20dB Min.  
 Amplitude Balance: ±1.5dB Max.  
 VSWR: 1.60:1 Max.  
 Input Power: 1W (Load vswr @ 1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 04-14-1999
APPROVED: T. Nguyen	DATE: 04-14-1999

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>		SCALE:	N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWING TITLE: <b>10-WAY POWER DIVIDER</b>		PART NO.: <b>PS10-6</b>		
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	SIZE: N/A	REV: N/A
THIRD ANGLE PROJECTION		OD2L5	DWG NO.: <b>81434</b>	
DO NOT SCALE THE DRAWING				