


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

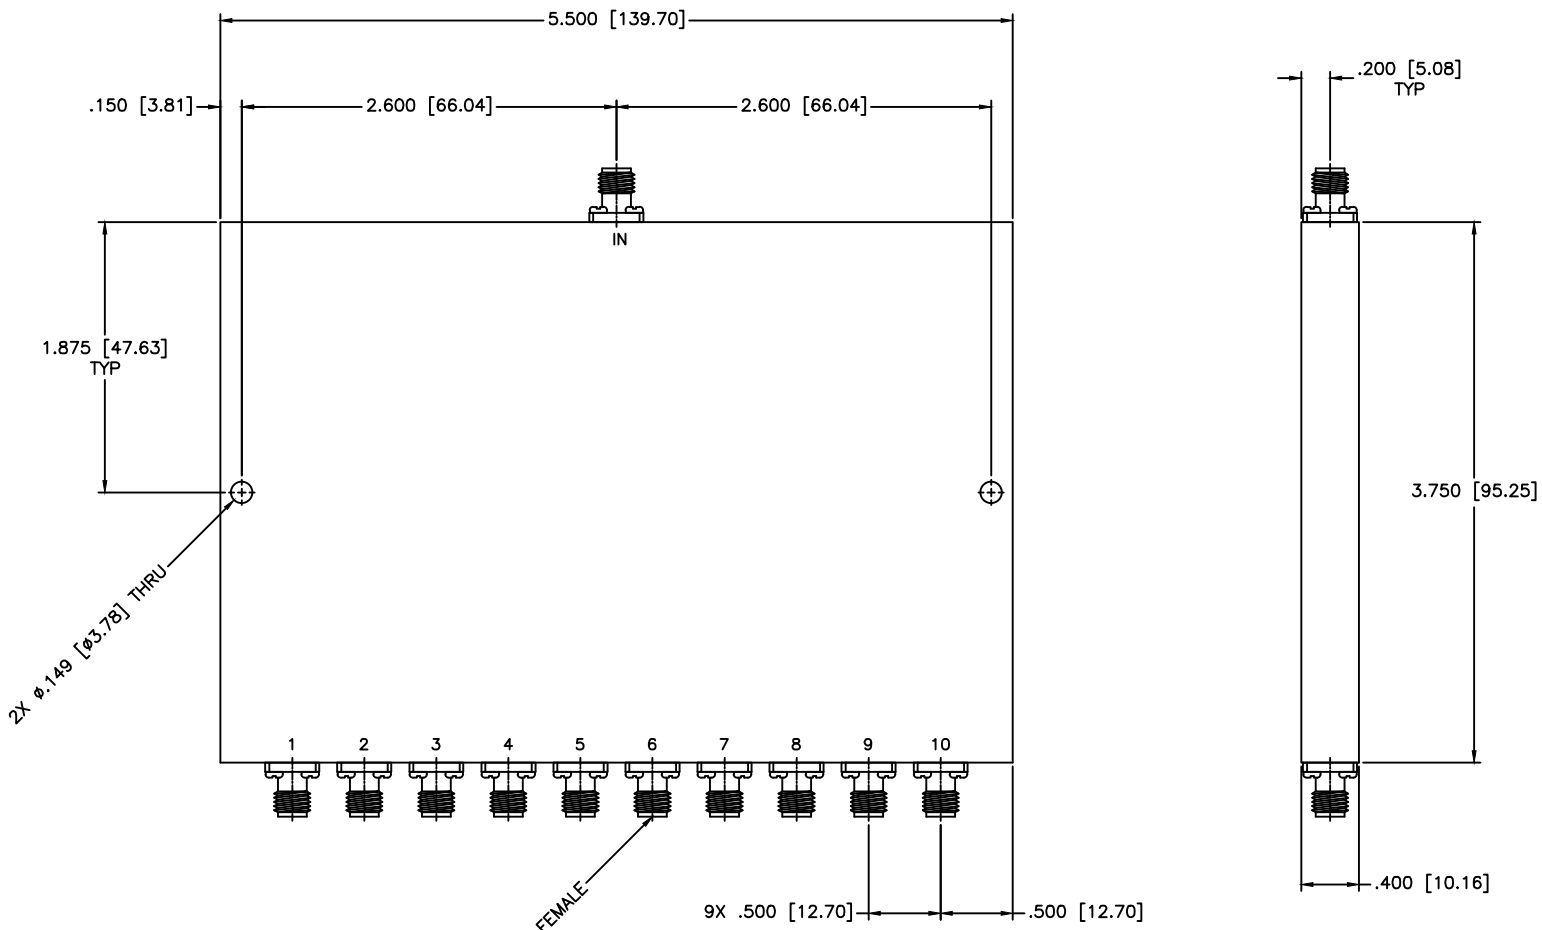

SPECIFICATIONS

- Frequency Range: 4–8 GHz
- Insertion Loss: 3dB Max.
- Isolation: 12dB Min.
- VSWR: 1.90:1 Max.
- Amplitude Balance: ±1.75dB Max.
- Input Power: 5W (Load vswr @ 1.2)

11X SMA FEMALE

MATERIAL:	
DRAWN: Paiboon Luexhamhan	DATE: 10-04-1999
APPROVED: T. Nguyen	DATE: 02-24-1998



MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

DRAWING TITLE:
10-WAY POWER DIVIDER

PART NO.
PS10-9

THIRD ANGLE PROJECTION

CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 81127
DO NOT SCALE THE DRAWING			