


**SPECIFICATIONS**  
 Frequency Range: 2.9–3.3 GHz  
 Insertion Loss: 1.4dB Max.  
 Isolation: 16dB Min.  
 VSWR: 1.70:1 Max.  
 Amplitude Balance: ±0.8dB Max.  
 Power: 20W

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

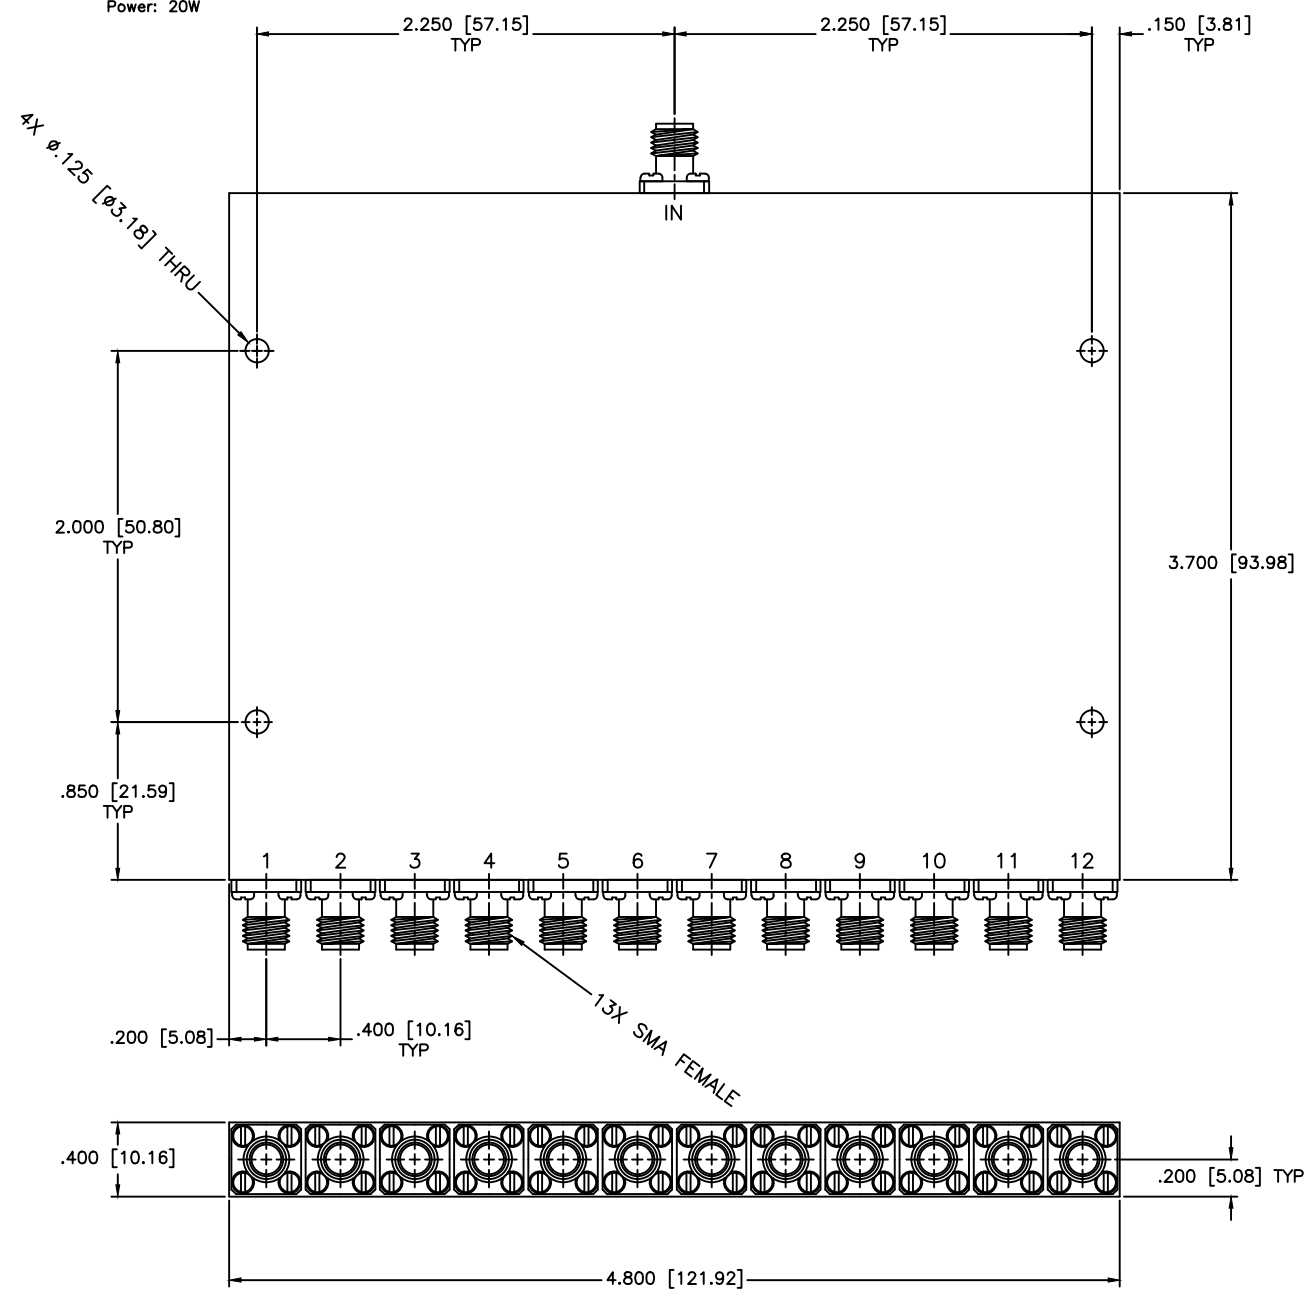

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 03-29-2012		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: 12-WAY OUTLINE DRAWING
			PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)
APPROVED: T. Nguyen DATE: 03-29-2012		CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 86054
			DO NOT SCALE THE DRAWING