


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

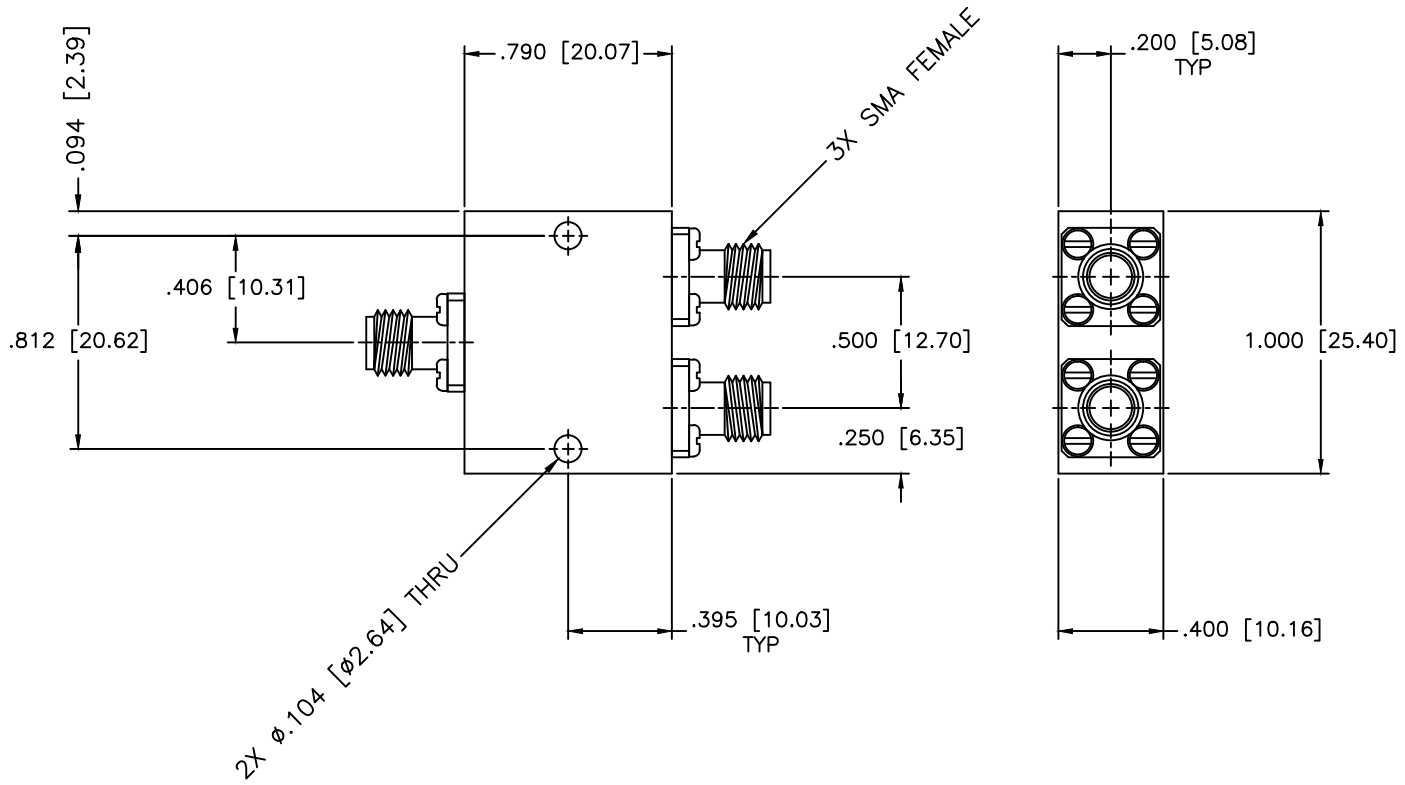

**SPECIFICATIONS**

Frequency Range: 5–18 GHz  
 Isolation: 19dB Min.  
 VSWR In/Out: 1.40/1.35:1 Max.  
 Insertion Loss: 0.5dB Max.  
 Amplitude Balance: ±0.3dB Max.  
 Phase Balance: ±6 Deg. Max.  
 Power: 30W (Load vswr@1.2)

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: <b>2-WAYS POWER DIVIDER</b>	
		PERMISSION TO REPRODUCE THIS INFORMATION IN THIS DRAWING IS PROHIBITED AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. <b>PS2-10</b>	
DRAWN:	DATE:	THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5
Paiboon Luekhamhan	04-13-1999		SIZE:	N/A
APPROVED:	DATE:		REV:	N/A
T. Nguyen	04-13-1999		DWG NO.	80004
			DO NOT SCALE THE DRAWING	