


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

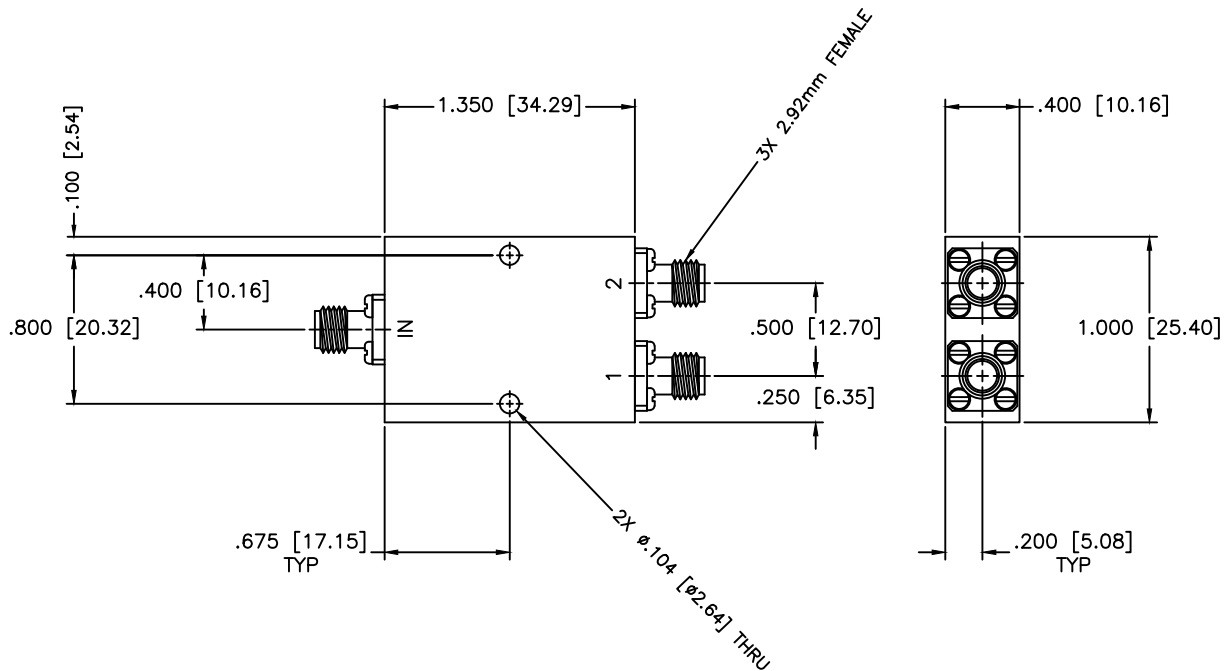

SPECIFICATIONS

Frequency Range: 26–31 GHz
 Insertion Loss: 3.0dB Max.
 Isolation: 15dB Min.
 VSWR: 2.10:1 Max.
 Amplitude Balance: ±0.3dB Max.
 Phase Balance: ±9 Deg. Max.
 Power: 10W (Load VSWR @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
		<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°</small>	DRAWING TITLE: 2-WAY POWER DIVIDER	
			PART NO. PS2-110	
DRAWN:	DATE:	<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>	CAGE CODE:	DWG NO.
APPROVED:	DATE:		OD2L5	SIZE: A
			DO NOT SCALE THE DRAWING	
			81942	