


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

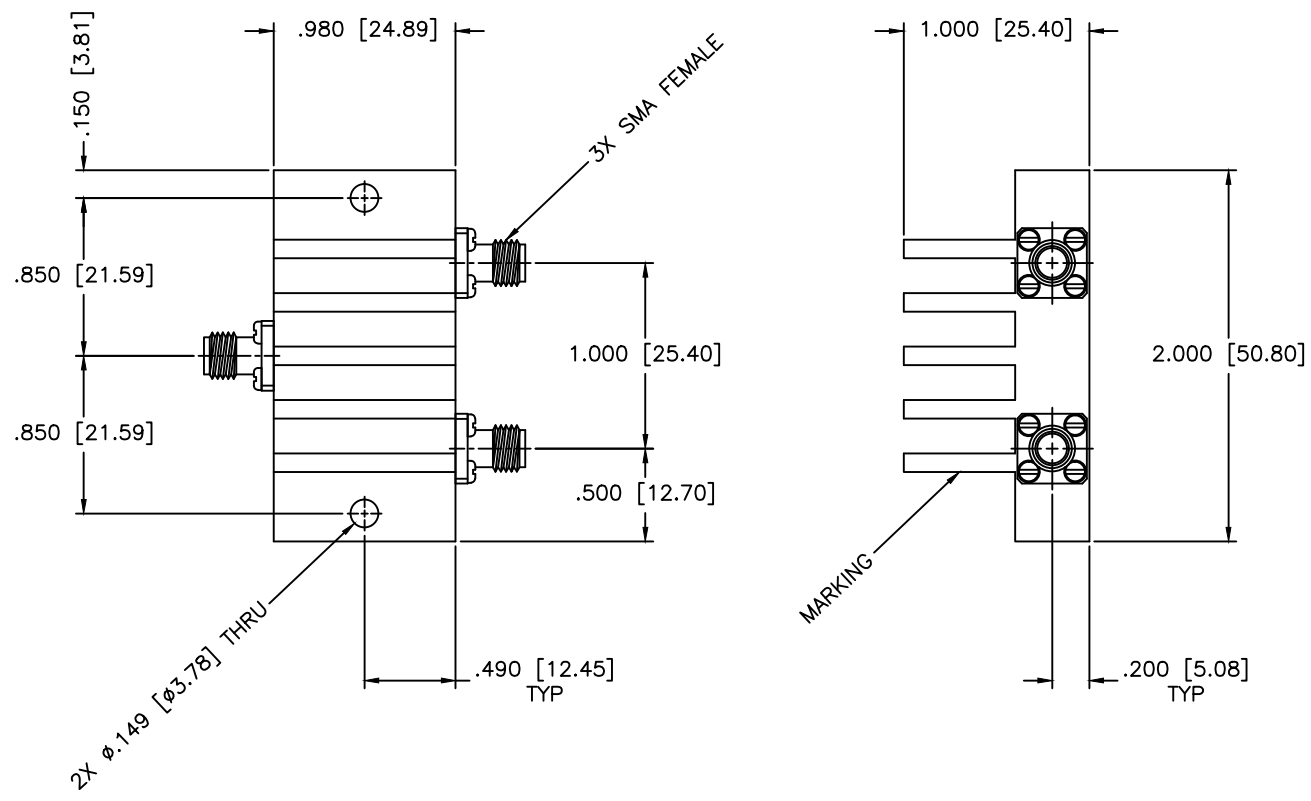

SPECIFICATIONS

Frequency Range: 5.75–5.85 GHz
 Insertion Loss: 0.4dB Typ./0.6dB Max.
 Isolation: 18dB Typ./15dB Min.
 Amplitude balance: ±0.3dB
 Phase balance: ±5 Deg. Max.
 VSWR: 1.35:1 Typ./1.45:1 Max.
 Power: 80 Watts CW Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:		SHEET:
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.		2-WAY POWER DIVIDER	
DRAWN:		DATE:	CAGE CODE:		SIZE:	REV:
Paiboon Luekhamhan		09-01-2010	OD2L5		A	B
APPROVED:		DATE:	DWG NO.		DO NOT SCALE THE DRAWING	
T. Nguyen		09-01-2010	85045			



THIRD ANGLE PROJECTION

