
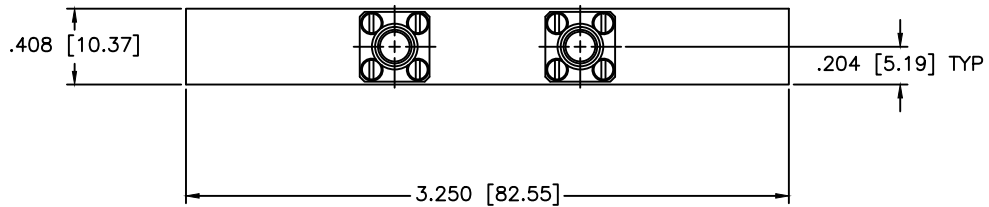


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range: 0.225–0.400 GHz
 Insertion Loss: 0.20dB Max.
 Isolation: 25dB Min.
 VSWR In/Out: 1.20:1/1.17:1 Max.
 Phase Balance: ±2 Deg. Max.
 Amplitude Balance: ±0.2dB Max.
 Power: 30W (Load vswr@1.2)

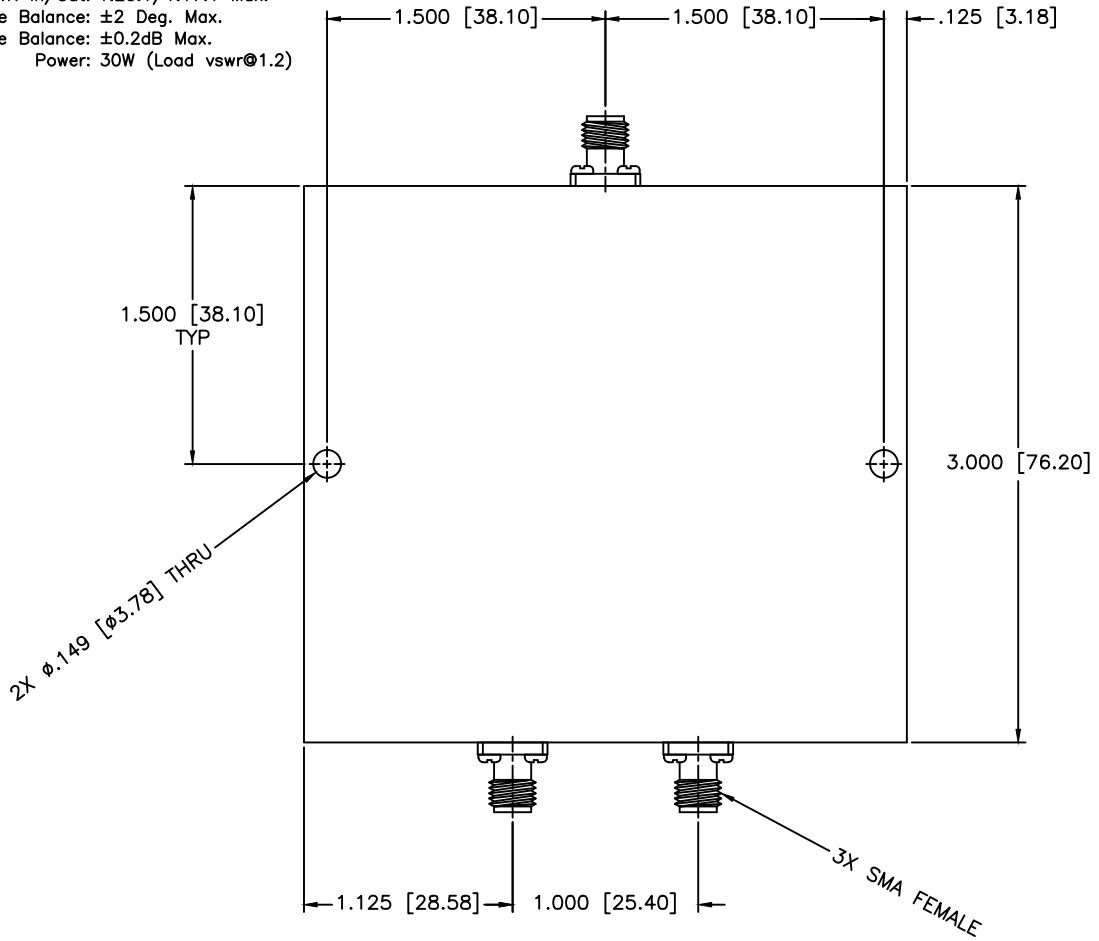

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.008 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 12-02-1997	PART NO. PS2-13		
APPROVED: T. Nguyen		DATE: 12-02-1997	CAGE CODE: OD2L5	SIZE: A	REV: A
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DWG NO. 80011	DO NOT SCALE THE DRAWING
		THIRD ANGLE PROJECTION 			