


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

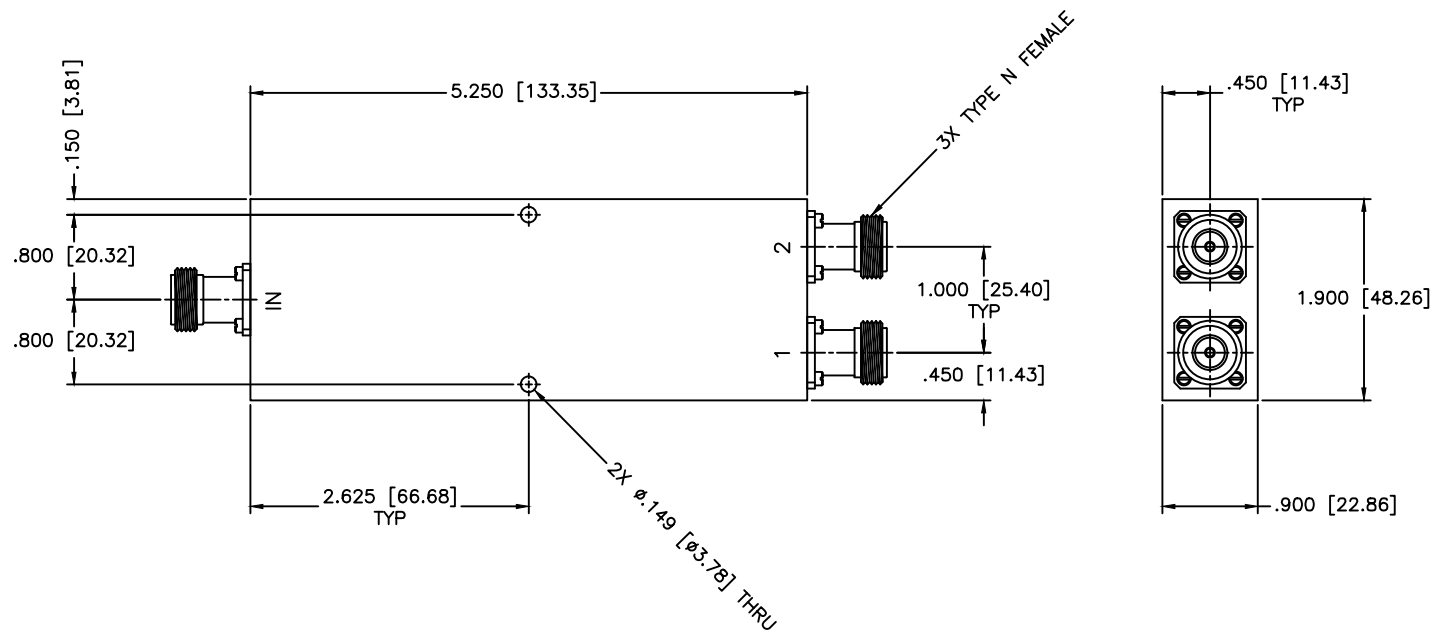

**SPECIFICATIONS**

Frequency Range: 0.3–6 GHz  
 Insertion Loss: 1.4dB Max.  
 Isolation: 16dB Min.  
 VSWR: 1.60:1Max.  
 Amplitude Balance: ±0.8dB Max.  
 Phase Balance: ±10 Deg. Max.  
 Power Rating: 30 Watts

MATERIAL:		 <small>MICROWAVE COMMUNICATIONS LABORATORIES INC.        7255 30TH AVE. N. SAINT PETERSBURG, FL 33710        TEL: (727) 344-6254 FAX: (727) 381-6116        http://www.mcli.com</small>	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ± .008 ANGLE: ± 1/2°	DRAWING TITLE: <b>2-WAY POWER DIVIDER</b>	
		PROPRIETARY NOTICE: <small>THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>	PART NO.: <b>PS2-134/NF</b>	
DRAWN: Paiboon Luekhamhan	DATE: 05-22-2012	 <small>THIRD ANGLE PROJECTION</small>	CAGE CODE:	OD2L5
APPROVED: T. Nguyen	DATE: 05-22-2012		SIZE:	N/A
			REV:	N/A
			DWG NO.:	86107
			DO NOT SCALE THE DRAWING	