


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

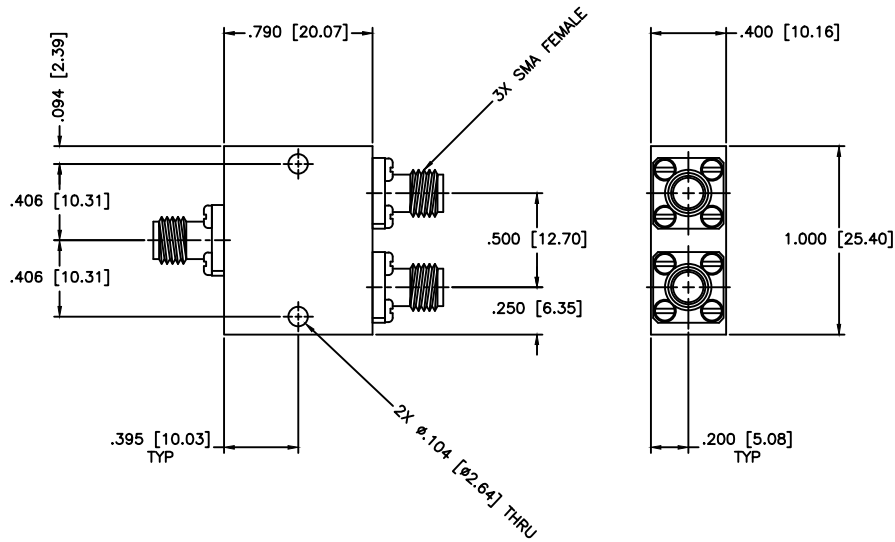

**SPECIFICATIONS**

Frequency Range: 12.75–18.5 GHz  
 Insertion Loss: 0.9dB Max.  
 Isolation: 16dB Min.  
 Amplitude Balance: ±0.3dB Max.  
 VSWR In/Out: 1.70:1/1.60:1 Max.  
 Phase Balance: ±12 Deg. Max.

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE:	N/A
			SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 04-12-1999	DRAWING TITLE: 2-WAY POWER DIVIDER	
APPROVED: T. Nguyen		DATE: 04-12-1999	PART NO. PS2-135	
<small>UNLESS OTHERWISE SPECIFIED:          TOLERANCES          IN (INCHES) OR [mm] (MILLIMETERS)          FRACTIONS: ± 1/64          DECIMALS: ±.01 ±.005          ANGLE: ±1/2°</small>		<small>PROPRIETARY NOTICE:          THE INFORMATION IN THIS DRAWING IS PROPRIETARY          AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN          PERMISSION FROM MICROWAVE COMMUNICATIONS          LABORATORIES INC. (MCLI)</small>	CAGE CODE: OD2L5	SIZE: A REV: B DWG NO. 80829
		<small>THIRD ANGLE PROJECTION</small> 	DO NOT SCALE THE DRAWING	