


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

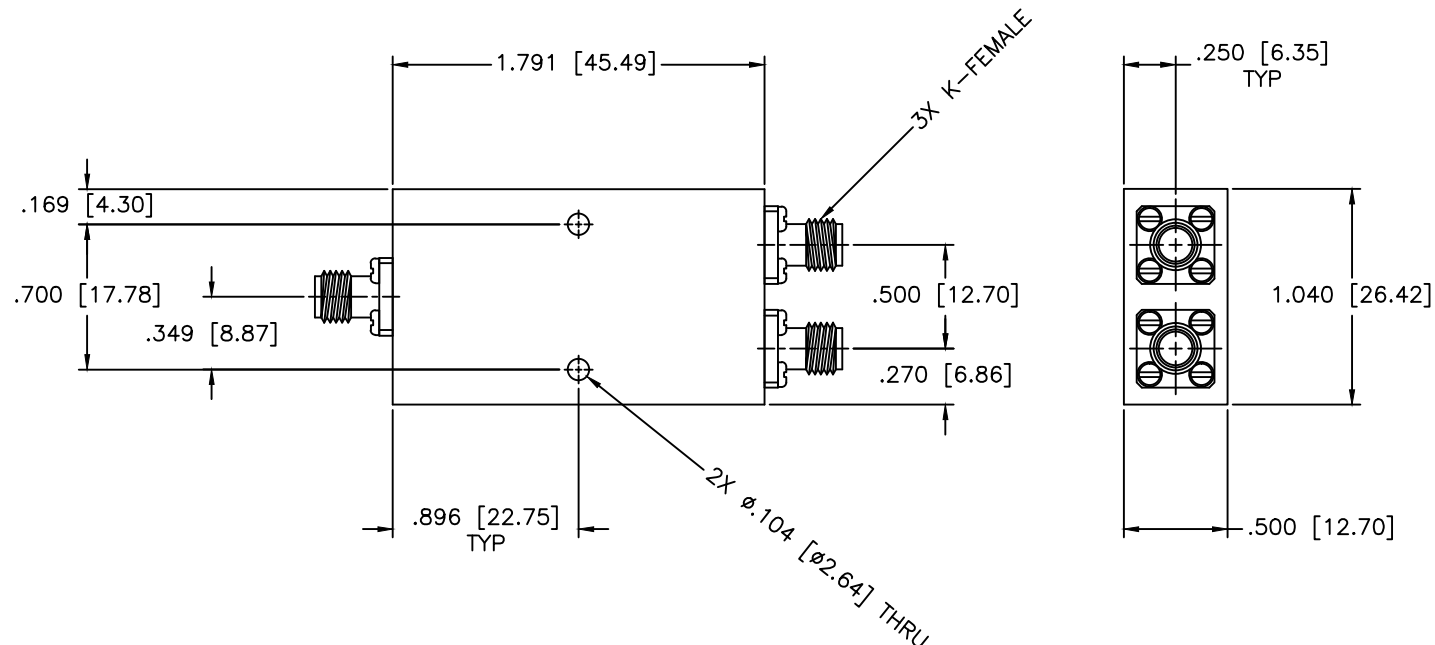

SPECIFICATIONS

Frequency Range: 2–26.5 GHz
 Insertion Loss: 1.8dB Max.
 Isolation: 17dB Min.
 VSWR: 1.60:1 Max.
 Phase Balance: ± 6 Deg. Max.
 Amplitude Balance: ± 0.5 dB Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER					
DRAWN: Paboon Luekhamhan DATE: 12-06-2005		PROPERLY NOTED: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PS2-14/KF		CAGE CODE: OD2L5	
APPROVED: T. Nguyen DATE: 12-06-2005		THIRD ANGLE PROJECTION 		SIZE: N/A REV: A DO NOT SCALE THE DRAWING		DWG NO.: 82454	