


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

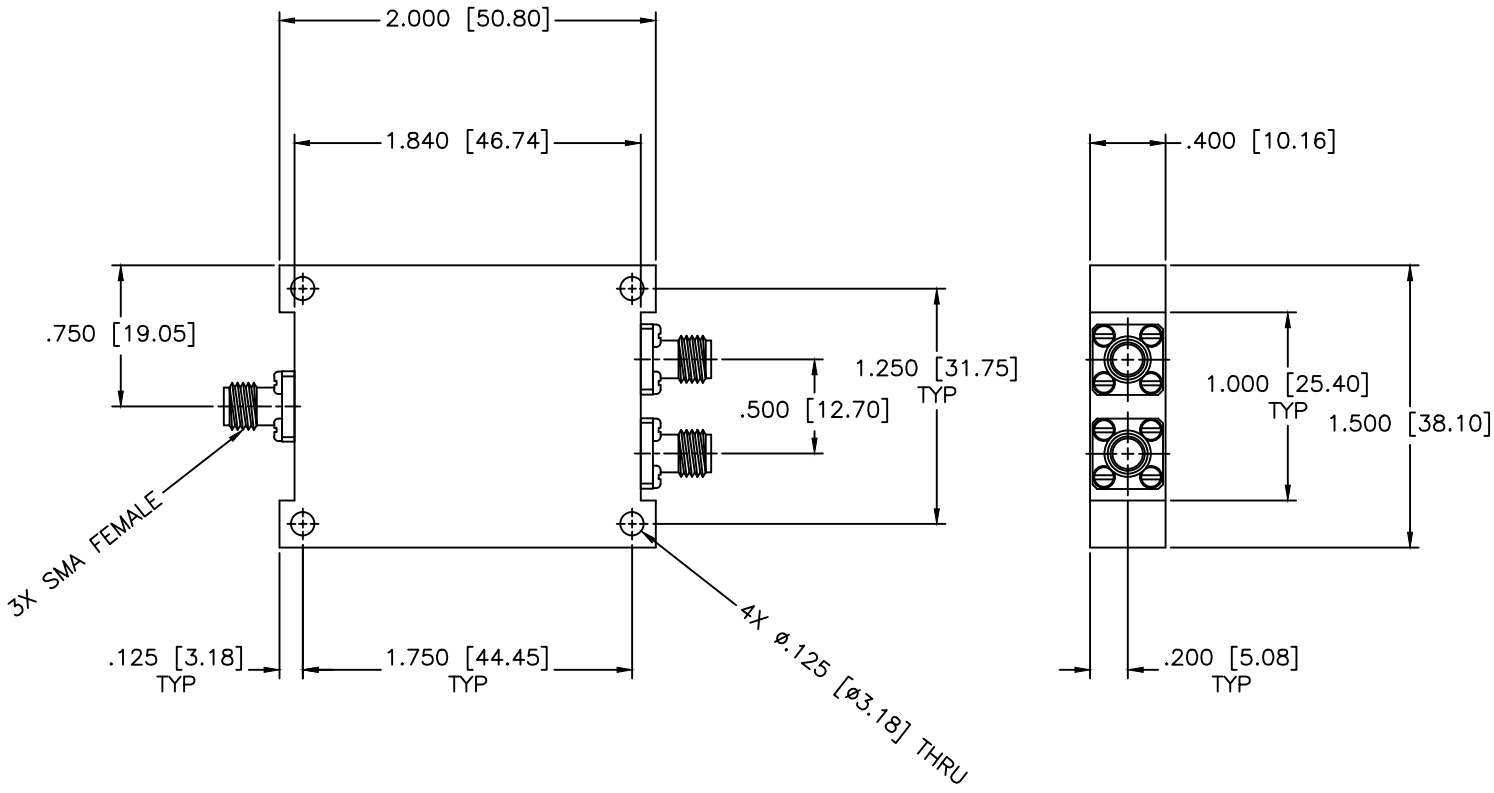

SPECIFICATIONS

- Frequency Range: 0.824–0.896 GHz
- Insertion Loss: 0.4dB Max.
- Isolation: 28dB Min.
- VSWR In/Out: 1.30:1/1.20:1 Max.
- Amplitude Balance: ±0.2dB Max.
- Phase Balance: ±2 Deg. Max.
- Power: 30W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWN:		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE:	
DATE:			2-WAY POWER DIVIDER	
APPROVED:		<small>PROSECUTOR'S NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small> 	PART NO.	
DATE:			PS2-150	
T. Nguyen		CAGE CODE: OD2L5	SIZE:	A
03-15-1999			REV:	A
		DO NOT SCALE THE DRAWING		DWG NO.
				82043