


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

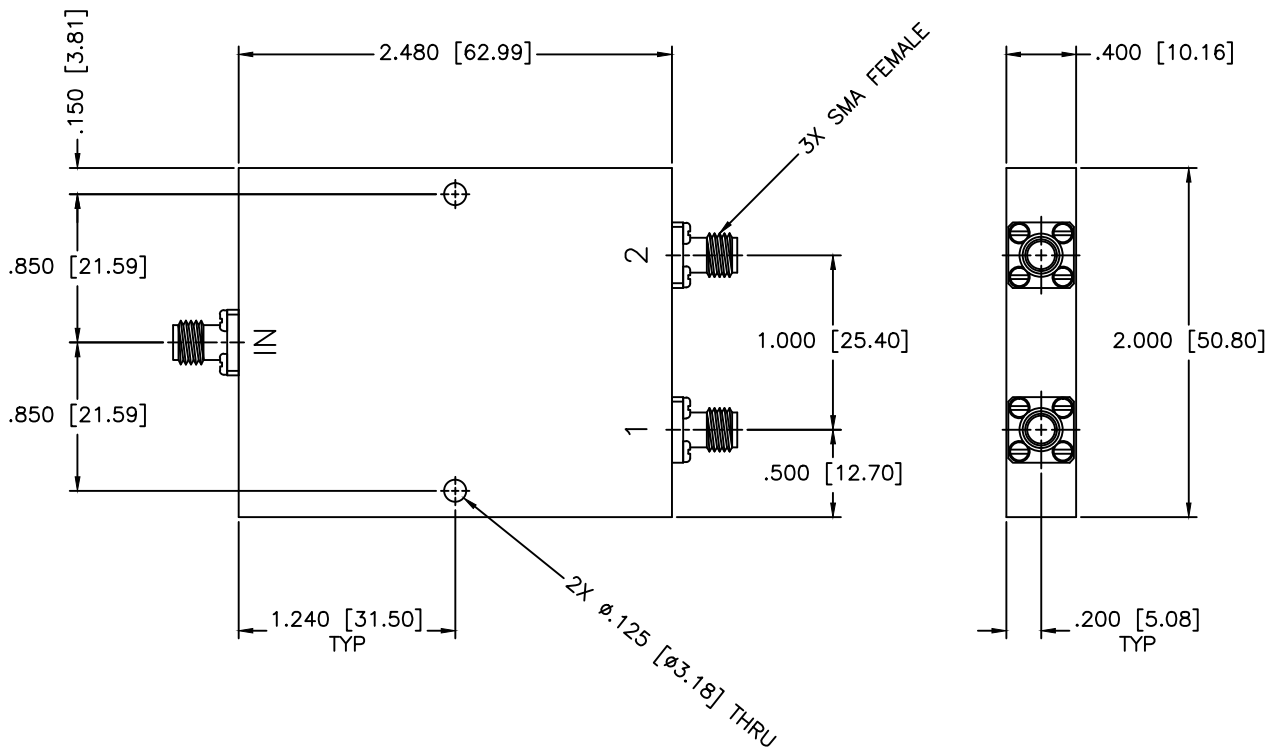

SPECIFICATIONS

Frequency Range: 0.8–3.0 GHz
 Isolation: 20dB Min.
 VSWR In/Out: 1.30:1/1.20:1 Max.
 Insertion Loss: 0.60 dB Max.
 Amplitude Balance: ±0.20 dB Max.
 Phase Balance: ±2 Deg Max.
 Power: 20W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS2-155		
DATE: 11-27-2007		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 11-27-2007		SIZE: N/A
THIRD ANGLE PROJECTION		REV: A		DWG NO. 83003
		DO NOT SCALE THE DRAWING		