


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

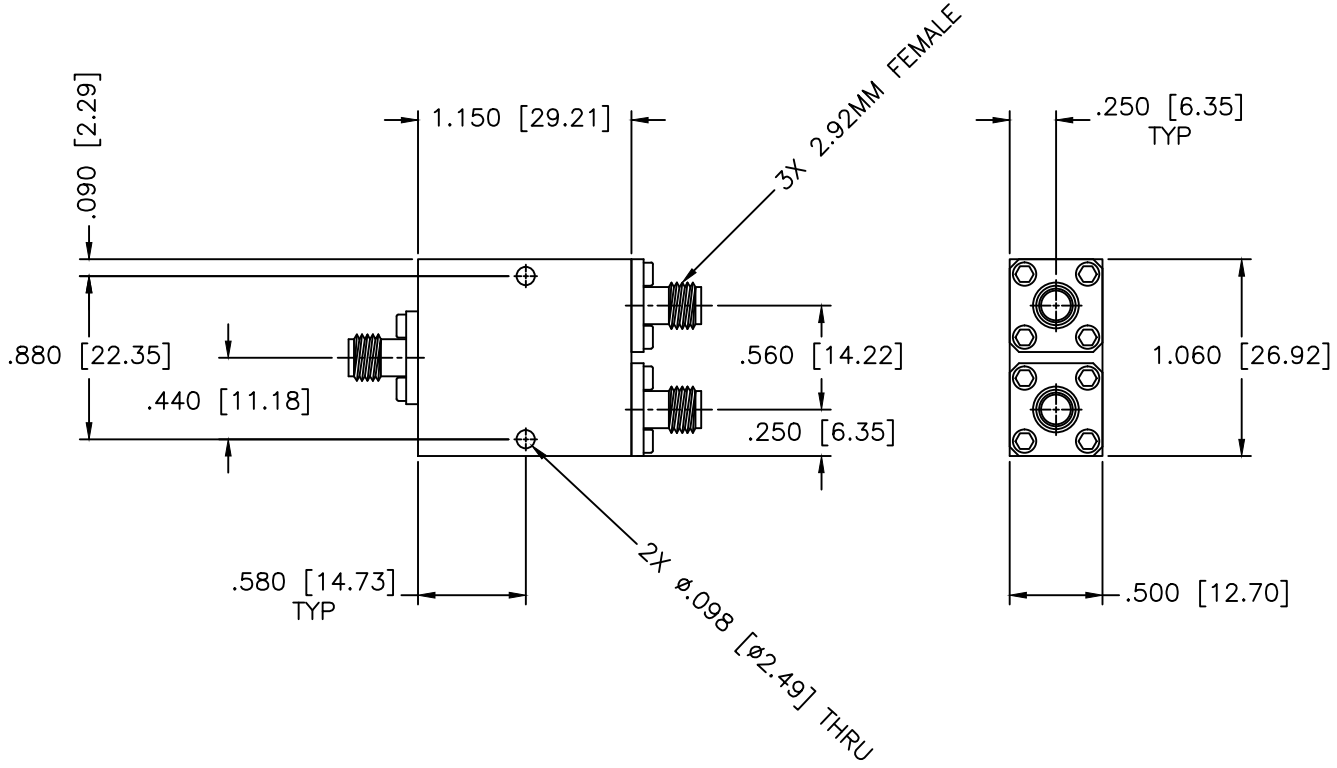

SPECIFICATIONS

- Frequency Range: 8–40 GHz
- Insertion Loss: 2.1dB Max.
- Output Isolation: 18dB Min.
- VSWR: 1.60:1 Max.
- Amplitude Balance: ± 0.6 dB Max.
- Phase Balance: ± 6 Deg. Max.
- Power: 20W (Load VSWR @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .012$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		PART NO.: PS2-159	
DATE: 06-12-2013		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		SIZE: A	REV: A
DATE: 06-12-2013		DWG NO.: 85025	
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING	