


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

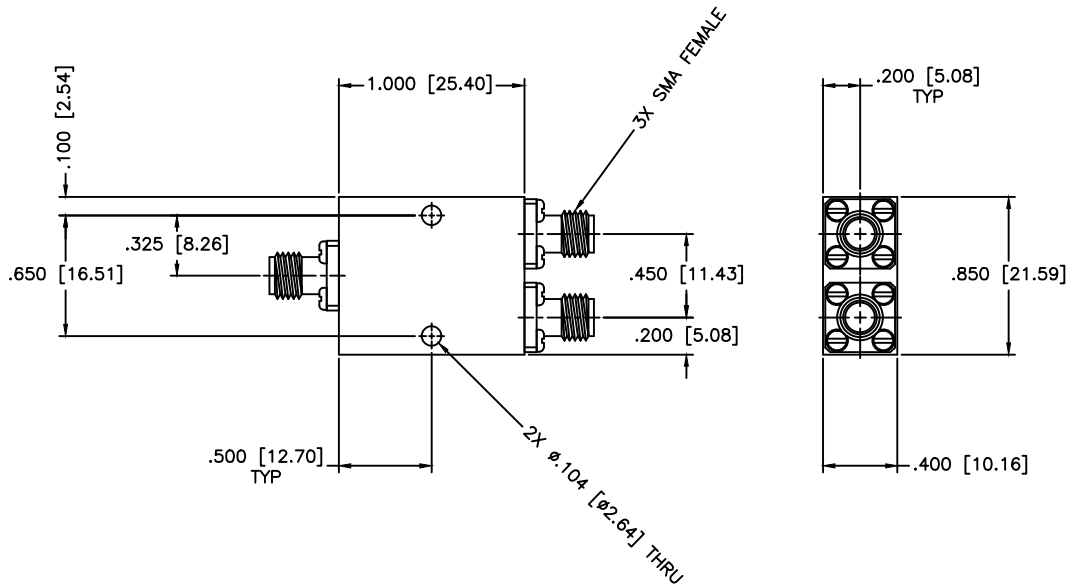

SPECIFICATIONS

Frequency Range: 3.625–4.25 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 20dB Min.
 VSWR In/Out: 1.20:1/1.18:1 Max.
 Phase Balance: ±2 Deg. Max.
 Amplitude Balance: 0.2dB Max.
 Power: 30W (Load vswr@1.2)

				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <h3>2-WAY POWER DIVIDER</h3>		SHEET:	N/A	
DRAWN: Paiboon Luekhamhan		DATE: 08-31-1999		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. <h3>PS2-19</h3>		
APPROVED: T. Nguyen		DATE: 08-31-1999		CAGE CODE: OD2L5		SIZE: N/A	REV: A	DWG NO. 80055
						DO NOT SCALE THE DRAWING		