


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

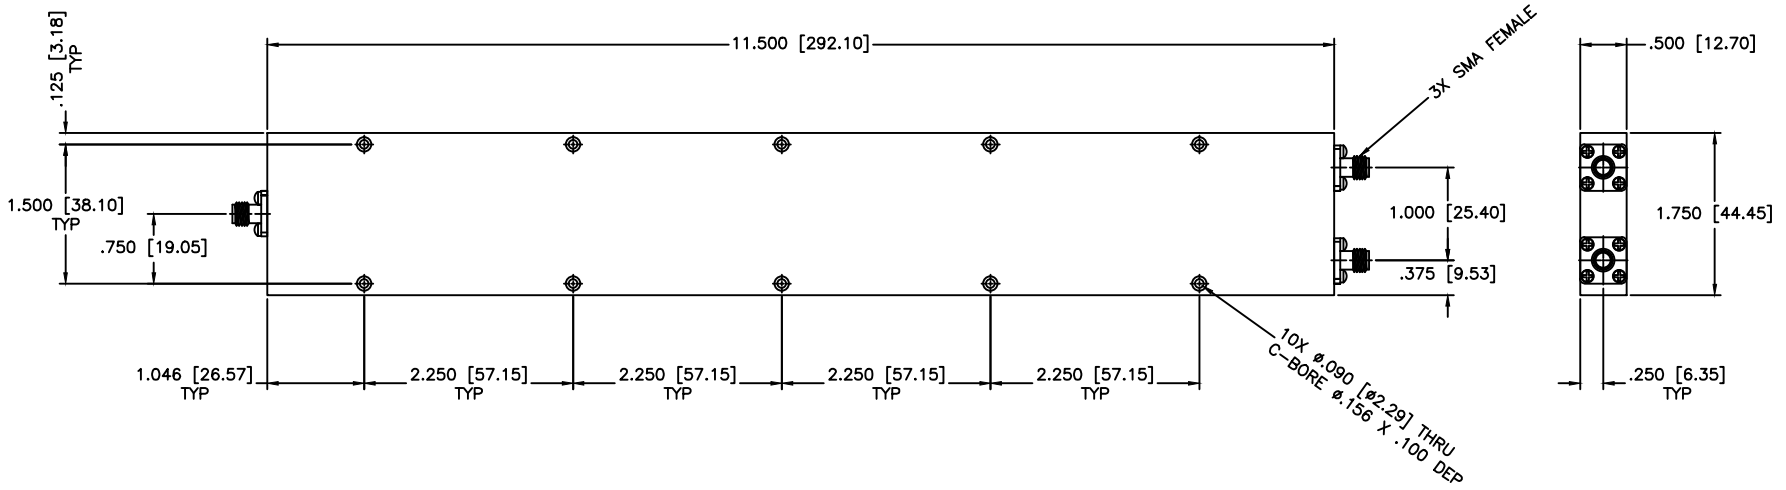

SPECIFICATIONS

Frequency Range: 0.3–18 GHz
 VSWR In/Out: 1.40:1/1.50:1 Max.
 Amplitude Balance: ±0.4dB Max.
 Phase Balance: ±3 Deg. Max.
 Insertion Loss: 4.3dB Max.
 Isolation: 17dB Min.
 Power: 10 Watts
 Operating Temperature: -32°C to +85°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±0.015 ±0.007 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:	
DRAWN: Paiboon Luekhamhan		DATE: 06-25-2010		PART NO.:		2-WAY POWER DIVIDER
APPROVED: T. Nguyen		DATE: 06-05-2010		CAGE CODE:		PS2-193
THIRD ANGLE PROJECTION		SIZE:		REV:	DWG. NO.:	
		OD2L5		N/A	84974	
DO NOT SCALE THE DRAWING						