


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

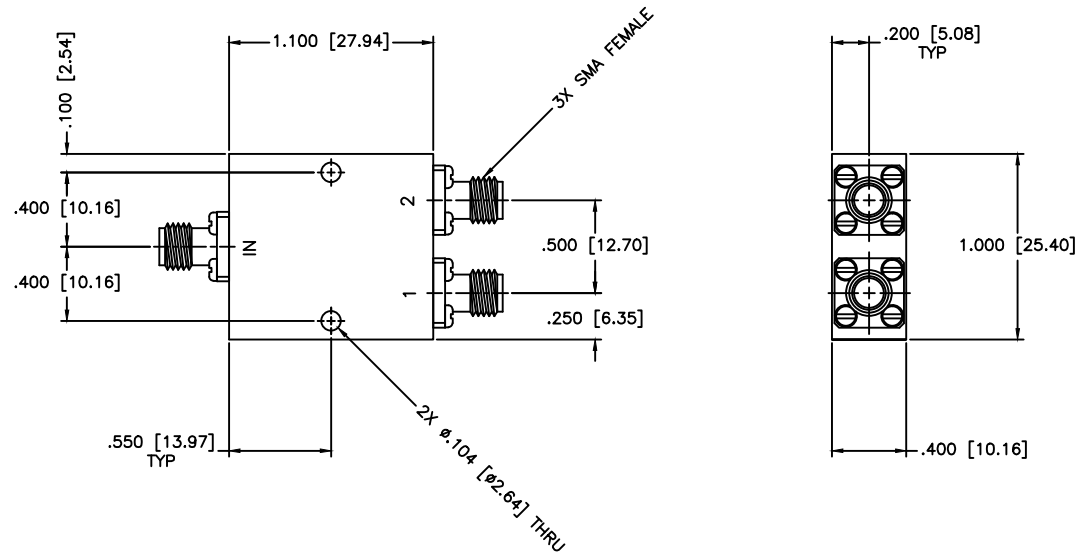

SPECIFICATIONS

Frequency Range: 5.8–6.45 GHz
 Insertion Loss: 0.6dB Max.
 Isolation: 21dB Min.
 VSWR In/Out: 1.25:1/1.15:1 Max.
 Phase Balance: ± 2 Deg. Max.
 Amplitude Balance: ± 0.2 dB Max.
 Power: 30W (Load vswr@1.2)

		MCLI	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER	
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.:		PS2-20	
APPROVED:	DATE:	THIRD ANGLE PROJECTION 	CAGE CODE:	SIZE:	REV:	DWG NO.:
Paiboon Luekhamhan	09-08-1999		OD2L5	N/A	N/A	80056
T. Nguyen	09-08-1999		DO NOT SCALE THE DRAWING			