


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

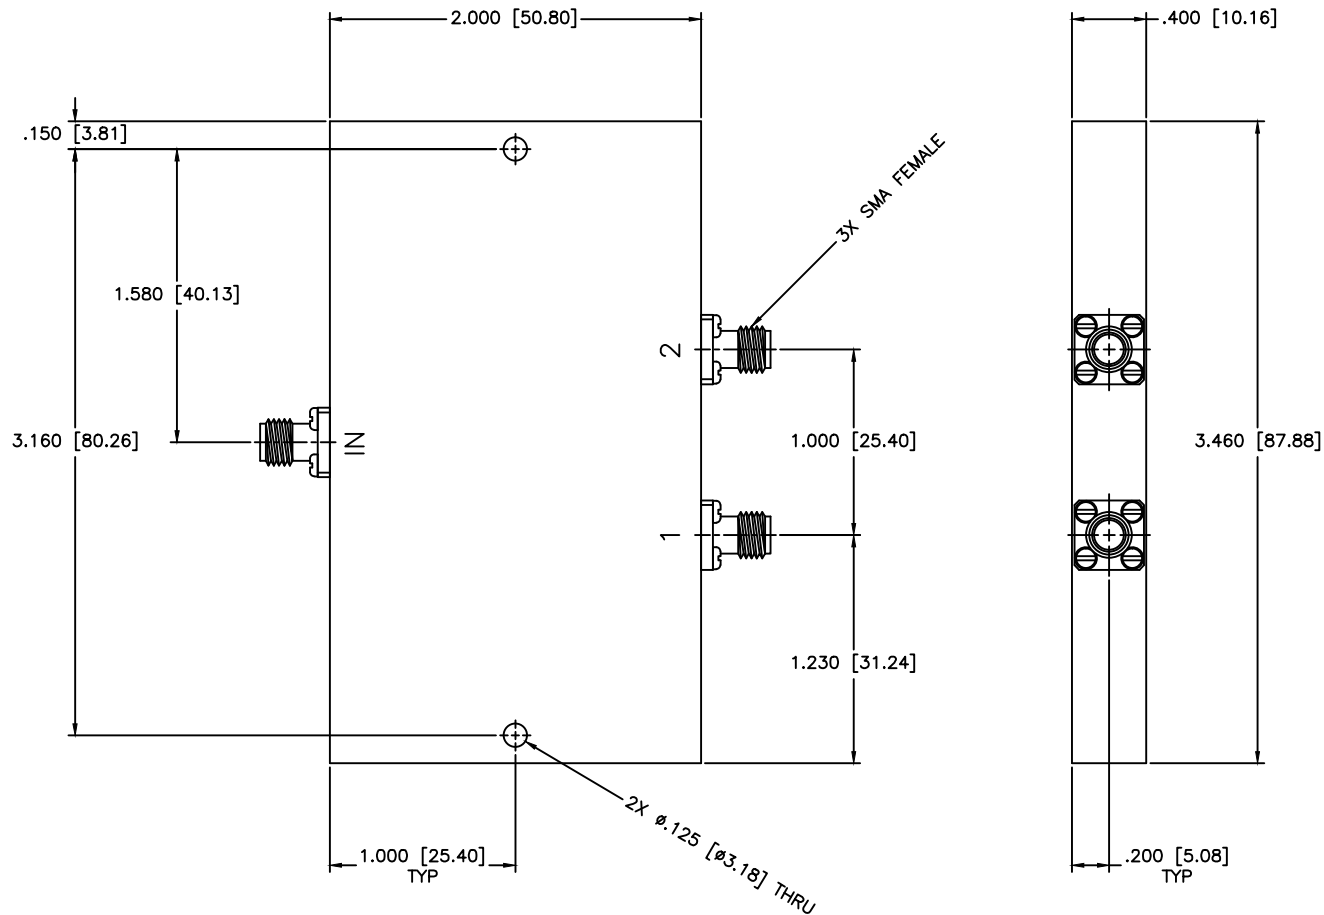

SPECIFICATIONS

Frequency Range: 225–400 MHz
 Insertion Loss: 0.3dB Max.
 Isolation: 25dB Min.
 VSWR: 1.20:1 Max.
 Amplitude Balance: ± 0.2 dB Max.
 Phase Balance: ± 2 Deg. Max.
 Power: 30 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER			
		PART NO.: PS2-225-400			
DRAWN: Paiboon Luekhamhan DATE: 05-26-1999		CAGE CODE: OD2L5 SIZE: N/A REV: N/A DWG. NO.: 81309		DO NOT SCALE THE DRAWING	
APPROVED: T. Nguyen DATE: 05-26-1999		THIRD ANGLE PROJECTION			