


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

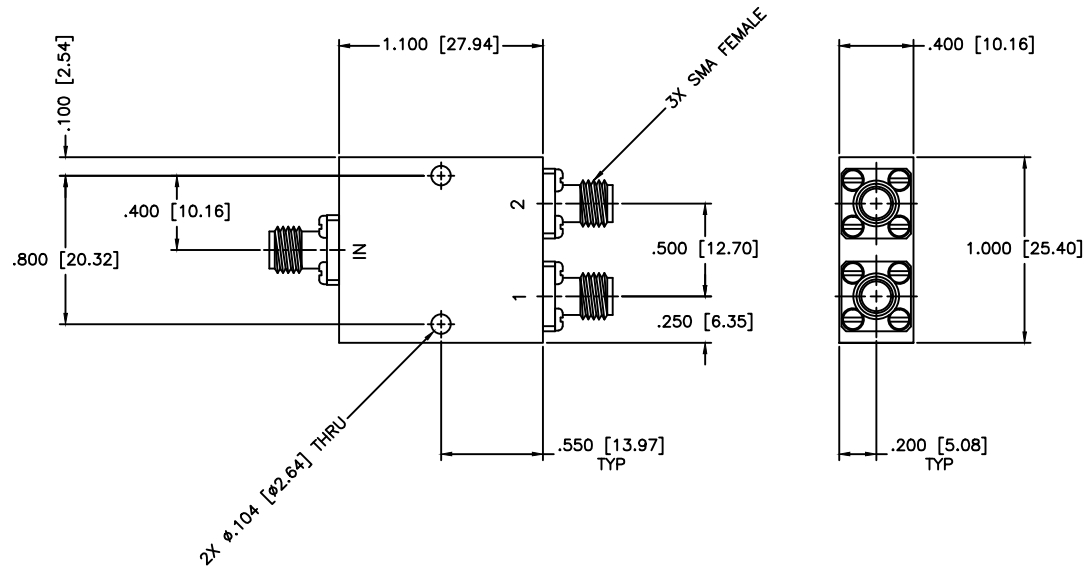

SPECIFICATIONS

Frequency Range: 4.4–5.0 GHz
 Insertion Loss: 0.5dB Max.
 Isolation: 18dB Min.
 Amplitude balance: ± 0.3 dB
 Phase balance: ± 3 Deg. Max.
 VSWR: 1.35:1 Max.
 Power: 60W CW Max.

		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:	
DRAWN: Paiboon Luekhamhan		DATE: 04-08-2011		2-WAY POWER DIVIDER PS2-229-60	
APPROVED: T. Nguyen		DATE: 04-08-2011			
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PS2-229-60		CAGE CODE:	OD2L5
THIRD ANGLE PROJECTION 		SIZE:	N/A	REV:	N/A
		DO NOT SCALE THE DRAWING		DWG NO.:	
				85596	