


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

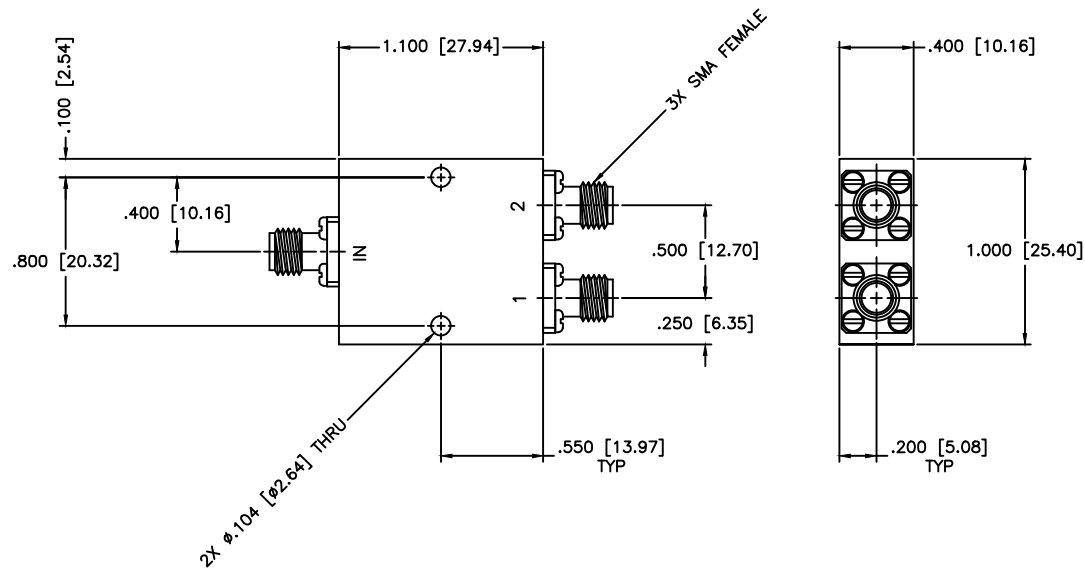

SPECIFICATIONS

Frequency Range: 5.2–5.6 GHz
 Insertion Loss: 0.3dB Max.
 Isolation: 22dB Min.
 Amplitude balance: ± 0.2 dB
 Phase balance: ± 2 Deg. Max.
 VSWR: 1.20:1 Max.
 Power: 30W (Load vswr@1.2)

		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER
DRAWN: Paiboon Luekhamhan DATE: 02-16-2009		PART NO.: PS2-241		DWG NO.: 84152
APPROVED: T. Nguyen DATE: 02-16-2009		CAGE CODE: OD2L5	SIZE: N/A REV: A DO NOT SCALE THE DRAWING	

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

