


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

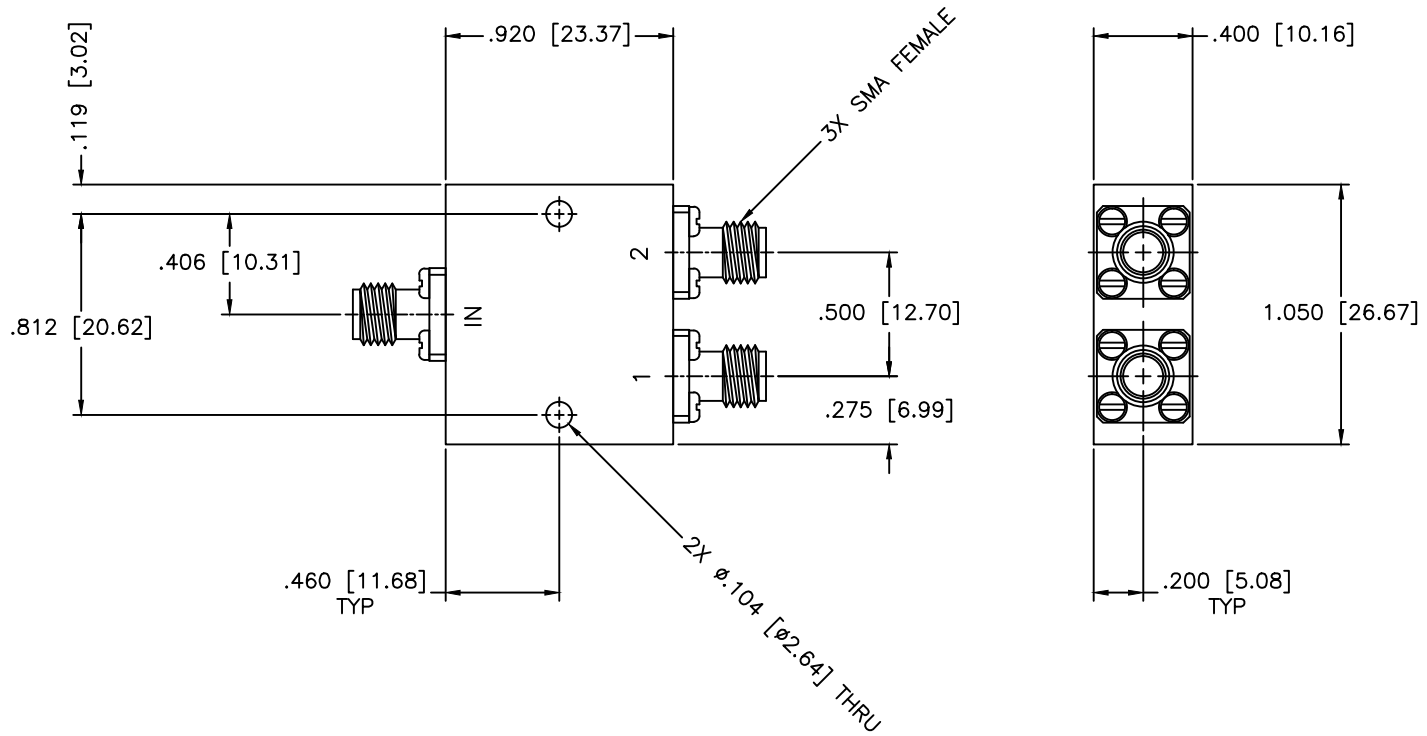

SPECIFICATIONS

Frequency Range: 5.8–6.8 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 22dB Min.
 VSWR Input/Output: 1.25:1/1.20:1 Max.
 Phase Balance: ±2 Deg. Max.
 Amplitude Balance: ±0.2dB Max.
 Power Handling: 30 Watts

		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan DATE: 12-05-2017		PART NO.: PS2-256	
APPROVED: T. Nguyen DATE: 12-05-2017		CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 86709
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	