


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

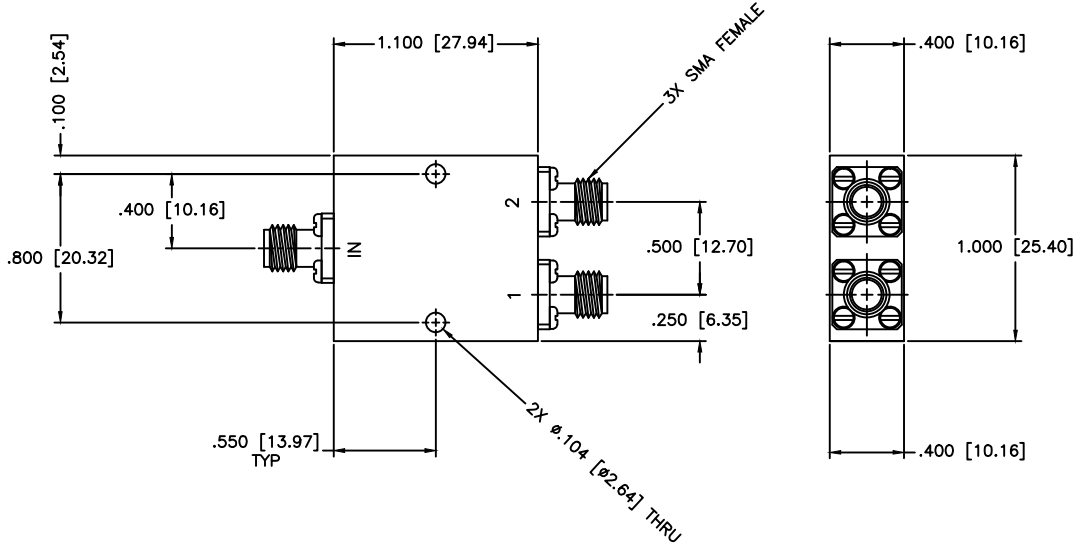

SPECIFICATIONS

Frequency Range: 5.9–6.4 GHz
 Insertion Loss: 0.5dB Max.
 Isolation: 18dB Min.
 VSWR: 1.35:1 Max.
 Phase Balance: ±3 Deg. Max.
 Amplitude Balance: ±0.3dB Max.
 Power: 60W (Load vswr@1.2)

		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: <h2 style="text-align: center;">2-WAY POWER DIVIDER</h2>		PART NO.: <h2 style="text-align: center;">PS2-28-60</h2>		
DRAWN: Paiboon Luekhamhan	DATE: 10-15-2009	PROPRIETARY NOTICE: <small>THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DWG NO.: 84604
APPROVED: T. Nguyen	DATE: 10-15-2009	THIRD ANGLE PROJECTION 	DO NOT SCALE THE DRAWING	