


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

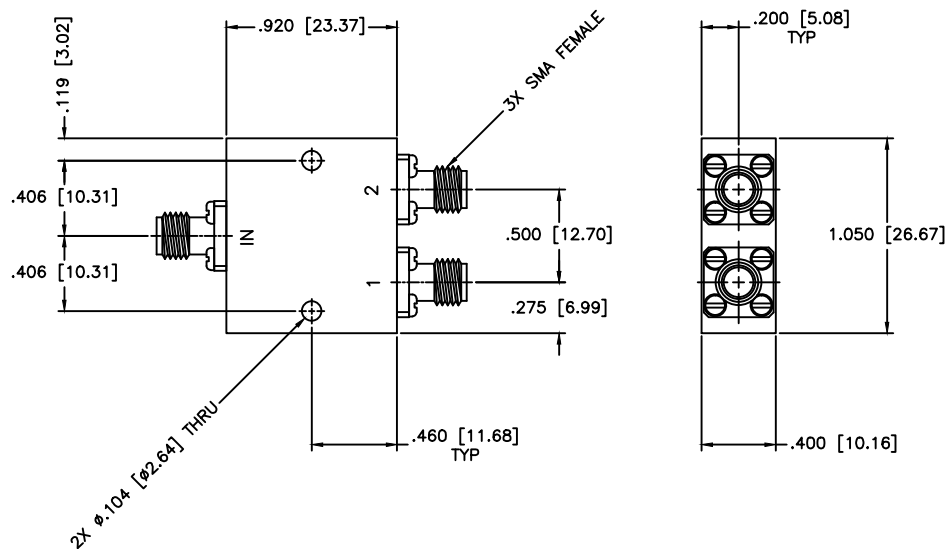

SPECIFICATIONS

Frequency Range: 3.5–4.5 GHz
 Insertion Loss: 0.5dB Max.
 Isolation: 19dB Min.
 VSWR In/Out: 1.35:1/1.25:1 Max.
 Phase Balance: ±3 Deg. Max.
 Amplitude Balance: ±0.2dB Max.
 Power: 30W (Load vswr@1.2)

				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 2-WAY POWER DIVIDER		SHEET:	N/A	
DRAWN: Paiboon Luekhamhan		DATE: 04-22-1999		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO. PS2-28		
APPROVED: T. Nguyen		DATE: 04-22-1999		CAGE CODE: OD2L5		SIZE: N/A	REV: A	DWG NO. 80848
						DO NOT SCALE THE DRAWING		